

LOC/DME I-CIZ
110.15
Chan **38** (Y)

APP CRS
186°

Rwy Idg
TDZE **889**
Apt Elev **896**

ILS or LOC RWY 18L

CINCINNATI/NORTHERN KENTUCKY INTL (CVG)

RADAR required for procedure entry. DME or RADAR required.

Simultaneous approach authorized with Rwy 18C and 18R. For inop ALS, increase S-LOC 18L Cat C and D visibility to RVR 6000.

MALSR

MISSED APPROACH: Climb to 1500 then climbing left turn to 3000 on CVG R-109 to CALIF INT/CVG 19 DME and hold.

D-ATIS
ARR **134.375** DEP **135.3**


CINCINNATI APP CON
119.7 363.15 (090°-269°)
123.875 363.15 (270°-089°)

CINCINNATI TOWER
118.975 360.85 (RWY 18L/36R)
118.3 (RWYS 18C/36C, 09/27)
133.325 (RWY 18R/36L)

GND CON **121.7**

CLNC DEL **127.175**

CPDLC

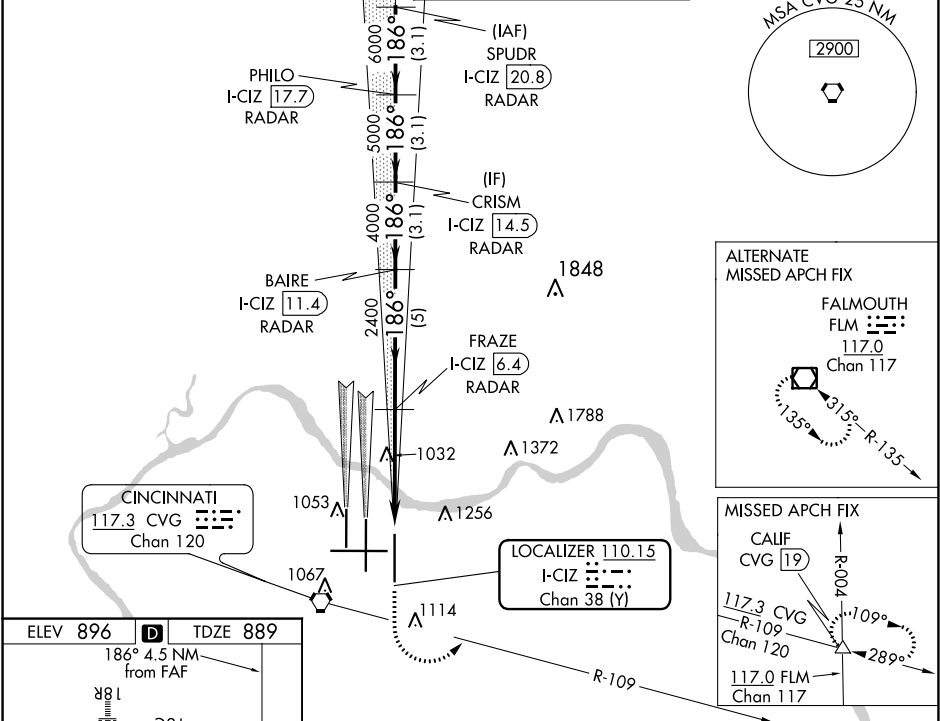

ELEV 896 **D** TDZE 889

186° 4.5 NM from FAF