
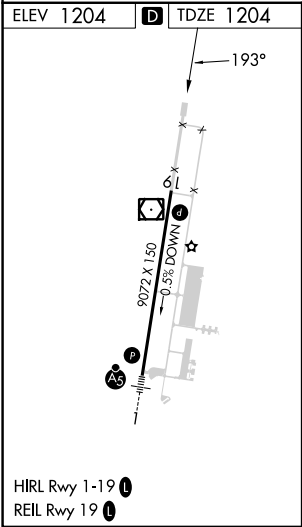


WAAS CH 86616 W19A	APP CRS 193°	Rwy Idg TDZE Apt Elev	9072 1204 1204
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 19
SAWYER INTL (SAW)

RNP APCH. ▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C.		MISSED APPROACH: Climb to 3500 direct EVYIP and hold.		
AWOS-3 118.375	MINNEAPOLIS CENTER 119.1 290.2	SAWYER TOWER ★ 119.975 (CTAF) 0	GND CON 121.65	UNICOM 122.7

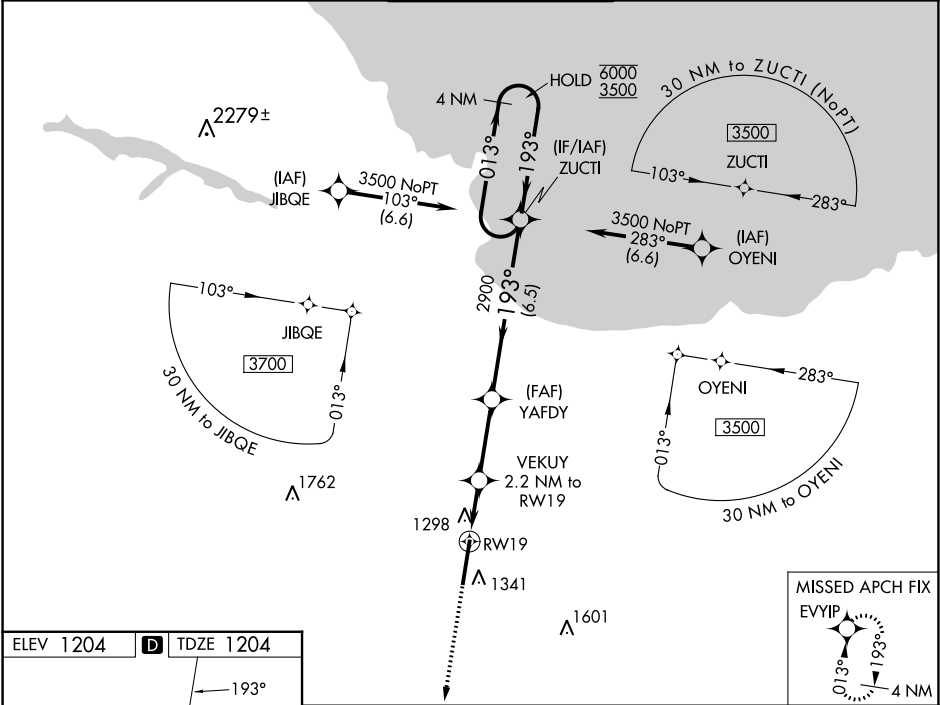

3500	EVYIP	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 53).		4 NM Holding Pattern
* LNAV only		YAFDY 2.2 NM to 2900 RW19	ZUCTI	
* 1.6 NM to RW19		* 1.6 NM to RW19	* 1960	2900
RW19		1.6 NM	0.6 NM	2.9 NM
		6.5 NM		
CATEGORY	A	B	C	D
LPV DA	1404-3/4 200 (200-3/4)			
LNAV/VNAV DA	1521-7/8 317 (400-7/8)			
LNAV MDA	1620-1	416 (500-1)	1620-1 1/8	416 (500-1 1/8)
C CIRCLING	1680-1	476 (500-1)	1820-1 3/4	1820-2
		616 (700-1 3/4)		616 (700-2)

EC-1, 18 MAY 2023 to 15 JUN 2023

EC-1, 18 MAY 2023 to 15 JUN 2023