


LOC/DME I-ALN	APP CRS	Rwy Idg	8099
108.5	294°	TDZE	531
Chan 22		Apt Elev	544


ILS or LOC RWY 29

ST LOUIS RGNL (ALN)

For inop ALS, increase WULIB fix minimums S-LOC 29 Cats C/D visibility to 1 SM.			MALSR A5	MISSED APPROACH: Climb to 1000 then climbing right turn to 2200 on heading 310° and on TOY VORTAC R-322 to TOPAZ INT/TOY 16 DME and hold.		
ATIS 128.0	ST LOUIS APP CON 124.2 353.9	REGIONAL TOWER ★ 126.0(CTAF) 0 239.0	GND CON 120.2	CINC DEL 120.2 (when tower closed)	UNICOM 122.95	

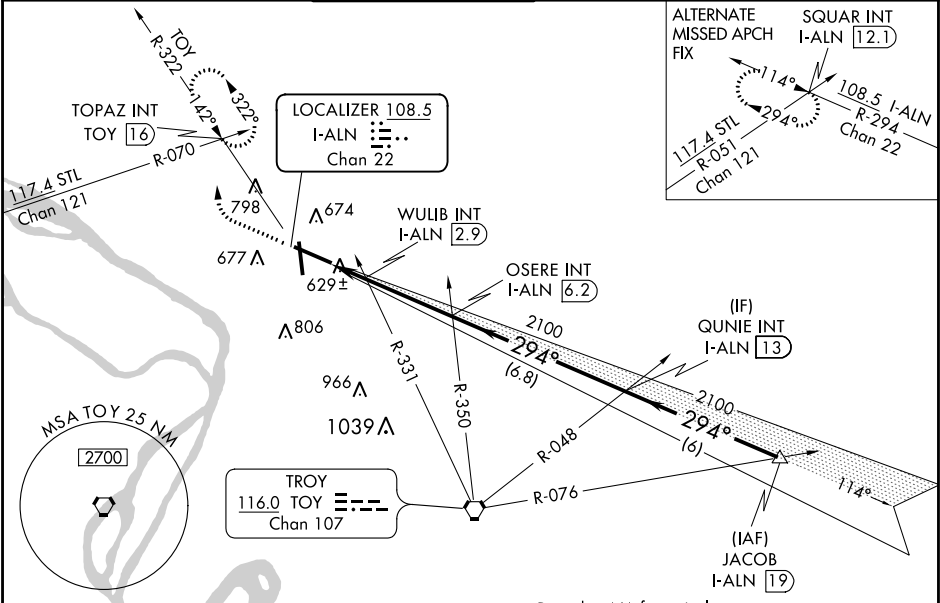

ELEV 544	D	TDZE 531
----------	---	----------

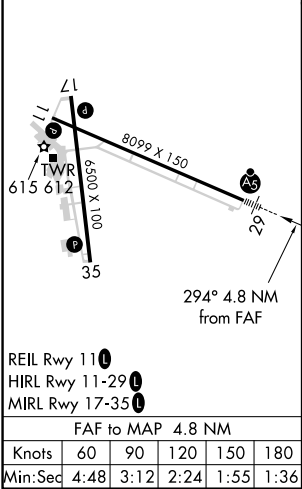

1000 2200		TOY R-322	TOPAZ INT	*LOC only.	
		OSERE INT I-ALN 6.2	QUNIE INT I-ALN 13	JACOB I-ALN 19	
I-ALN 1.5		WULIB INT I-ALN 2.9	2100	2100	2100
1.4 NM		3.3 NM	6.8 NM	6 NM	GS 3.00° TCH 55
CATEGORY	A	B	C	D	
S-ILS 29	731-1/2		200 (200-1/2)		
S-LOC 29	980-1/2	449 (500-1/2)	980-7/8	449 (500-7/8)	
CIRCLING	1000-1	456 (500-1)	1160-13/4	1200-2	
WULIB FIX MINIMUMS (DUAL VOR RECEIVERS OR DME REQUIRED)					
S-LOC 29	880-1/2	349 (400-1/2)	880-5/8	349 (400-5/8)	
CIRCLING	1000-1	456 (500-1)	1160-13/4	1200-2	
			616 (700-13/4)	656 (700-2)	