
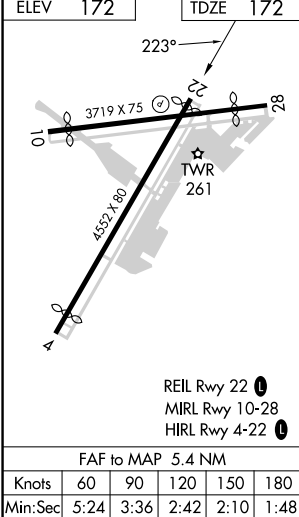


LOC I-CDW	APP CRS	Rwy Idg	4417
109.35	223°	TDZE	172
		Apt Elev	172

LOC RWY 22
ESSEX COUNTY (CDW)

From ZEZE: RNAV 1-GPS required. RNAV 1-GPS or RADAR required for procedure entry.			
Circling to Rwy 4, 10, 28 NA at night. Rwy 22 helicopter visibility reduction below 1 SM NA. When local altimeter setting not received, use Newark altimeter setting and increase all MDA 60 feet and S-22 Cat A and Circling Cat C visibility ¼ SM. KOLLI INT minimums: increase all MDA 60 feet and increase S-22 Cats C/D and Circling Cats A and C visibility ¼ SM.			
MISSED APPROACH: Climb to 600 then climbing right turn to 2000 direct CAT NDB and hold (ADF required).			

ATIS	NEW YORK APP CON	CALDWELL TOWER ★	GND CON	CLNC DEL	UNICOM
135.5	127.6 379.9	119.8 (CTAF) 0	121.9	121.1	122.95

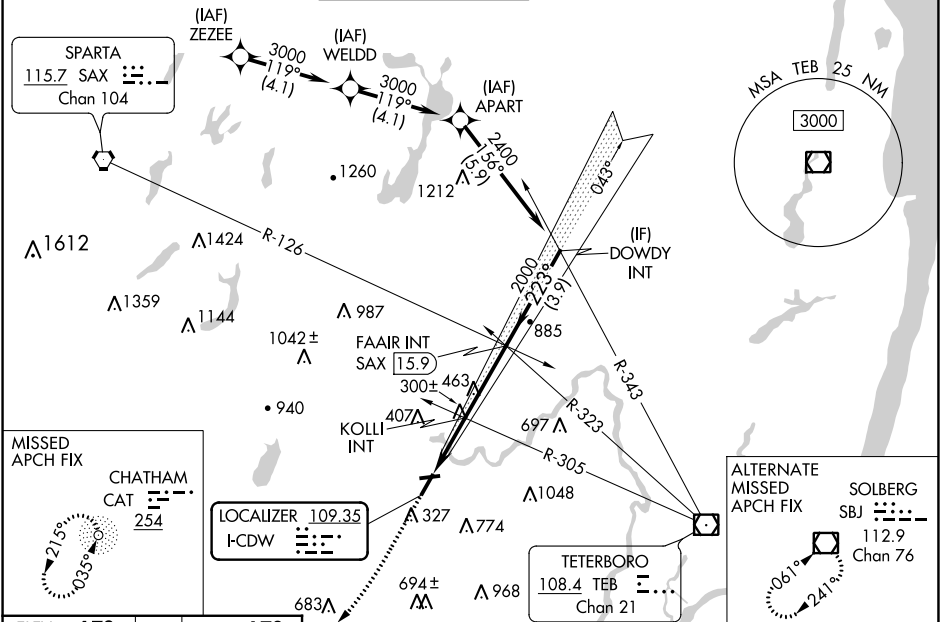

ELEV 172 TDZE 172			
VGS and descent angles not coincident (VGS Angle 3.00/TCH 42).			
CATEGORY			
S-LOC 22			
CIRCLING			
KOLLI INT MINIMUMS			
S-LOC 22			
CIRCLING			