

WAAS
CH **63123**
W10A

APP CRS
104°

Rwy Idg
TDZE **1191**
Apt Elev **1191**

RNAV (GPS) RWY 10
KNOX COUNTY (4I3)

RNP APCH.


▼

▲

Baro-VNAV and VDP NA when using Newark altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 36°C (96°F). When Local altimeter setting not received, use Newark altimeter setting and increase all DA 86 feet and all MDA 100 feet and increase LPV all Cats, LNAV/VNAV all Cats, LNAV Cat C and D visibility ¼ mile. Rwy 10 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 2800 direct PATIE and hold.

AWOS-3 126.05	COLUMBUS APP CON 125.95 317.775	CLNC DEL 119.45	UNICOM 123.05 (CTAF) 0
-------------------------	---	---------------------------	----------------------------------

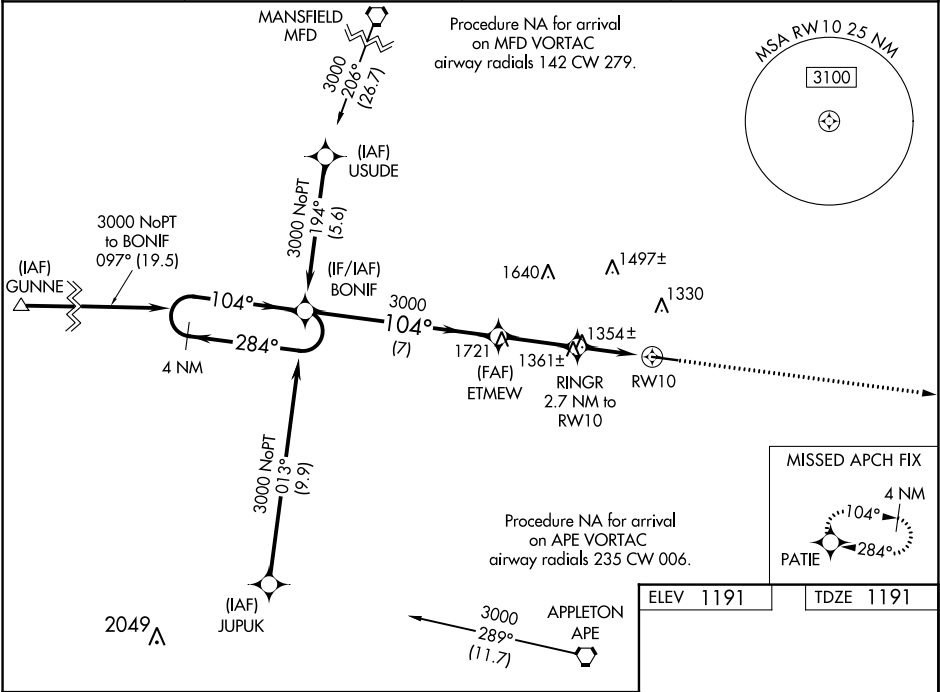

4 NM Holding Pattern

BONIF

ETMEW

RINGR 2.7 NM to RW10

2800

PATIE

3000 ← 284°

104° →

3000

104°

3000

*2080

*1.2 NM to RW10

RW10

*LNAV only.

GP 3.00°

TCH 40

7 NM

2.9 NM

1.5 NM

1.2

CATEGORY	A	B	C	D
LPV DA	1520-1½ 329 (400-1½)			
LNAV/VNAV DA	1516-1½ 325 (400-1½)			
LNAV MDA	1620-1 429 (500-1)		1620-1¼ 429 (500-1¼)	

MIRL Rwy 10-28 0

REIL Rwy 10 and 28 0