

WAAS CH 58107 W13A	APP CRS 129°	Rwy Idg TDZE 1005 Apt Elev 1008
--	------------------------	---



RNAV (GPS) RWY 13

GRINNELL RGNL (GGI)

When local altimeter setting not received, use Newton altimeter setting and increase all DAs 38 feet and all MDAs 40 feet, increase LPV and LNAV/VNAV visibility ¼ mile all Cats and LNAV Cat C visibility ¼ mile. Baro-VNAV NA when using Newton altimeter setting.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F).
Visibility reduction by helicopters NA. DME/DME RNP-0.3 NA.

MISSED APPROACH: Climb to 3000 direct PICRA and hold.

AWOS-3 120.725	CHICAGO CENTER 127.05 319.8	UNICOM 122.8 (CTAF) 0
--------------------------	---------------------------------------	---------------------------------

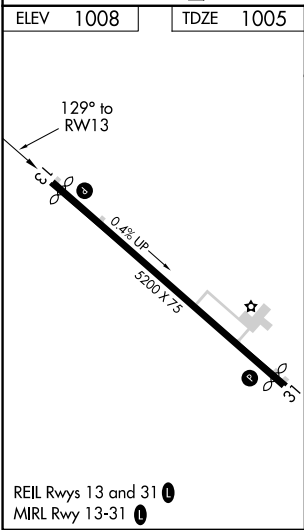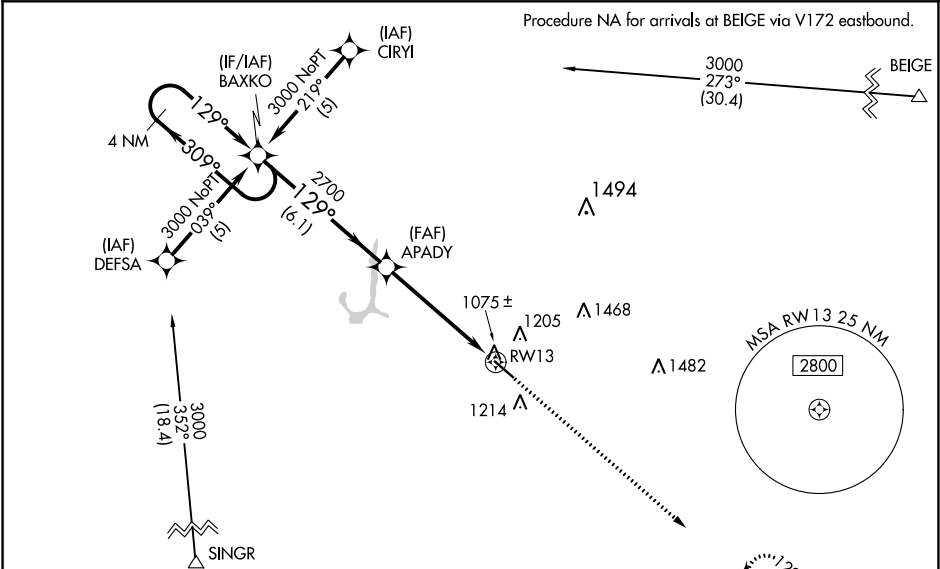

4 NM Holding Pattern					3000	PICRA
3000 ← 309° → 129°					APADY	
GP 3.00° TCH 34					2700	
					6.1 NM	5.2 NM
CATEGORY	A	B	C	D		
LPV DA	1284-1 279 (300-1)				NA	
LNAV/VNAV DA	1415-1½ 410 (500-1½)				NA	
LNAV MDA	1480-1	475 (500-1)	1480-1¼ 475 (500-1¼)		NA	
CIRCLING	1620-1	612 (700-1)	1620-1¾ 612 (700-1¾)		NA	