

WAAS CH 45926 W03A	APP CRS 027°	Rwy Idg 5003 TDZE 530 Apt Elev 537
--	------------------------	---

RNAV (GPS) RWY 3

OHIO COUNTY (JQ.D)

RNP APCH - GPS.

▼ Baro-VNAV and VDP NA when using Owensboro altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use Owensboro altimeter setting and increase LPV and LNAV/VNAV DA to 851 feet. Increase all MDA 80 feet and LNAV Cat C visibility ¾ SM and Circling Cat C visibility ¼ SM. **▲** Circling Rwy 21 NA at night. Rwy 3 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH:
Climb to 2500 direct
ZUTJO and hold.

AWOS-3PT


132.1

EVANSVILLE APP CON ★



124.025 290.9

UNICOM

122.8 (CTAF) L

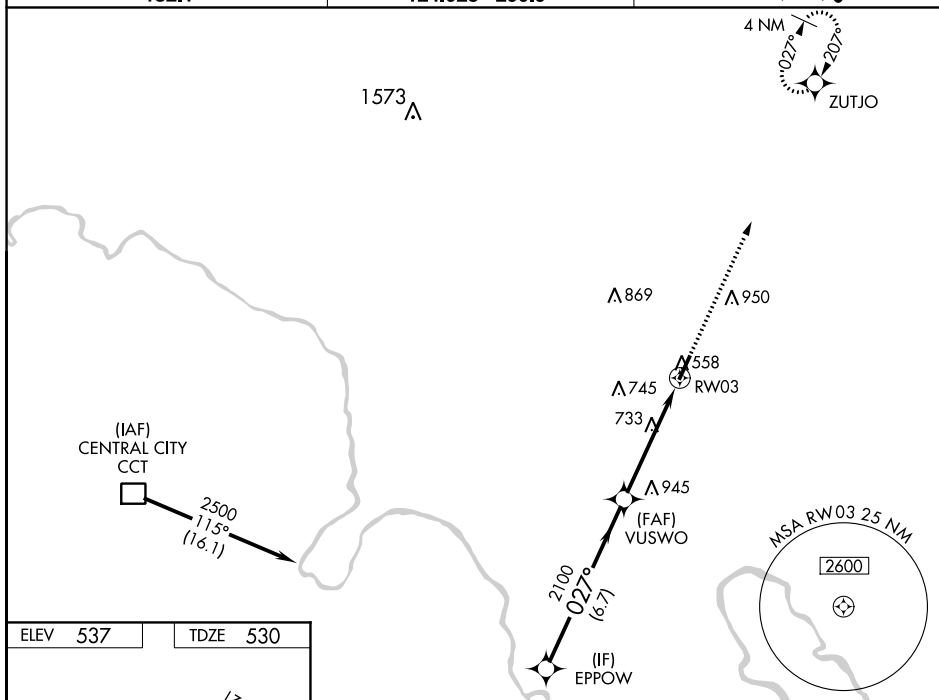

ELEV 537		TDZE 530
----------	--	----------

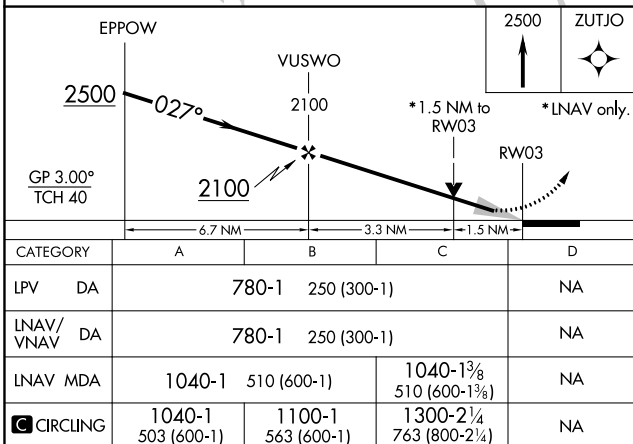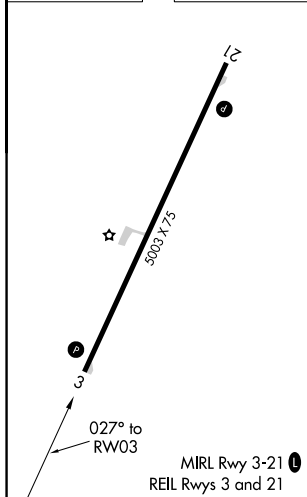

RNAV (GPS) RWY 3