

APP CRS
218°

Rwy Idg
TDZE
3606

Apt Elev
3607

RNAV (RNP) Z RWY 22

RICK HUSBAND AMARILLO INTL (AMA)

▼


ASR

For uncompensated Baro-VNAV systems, procedure NA below -14°C (7°F) or above 52°C (125°F). RF required. For inop ALS, increase RNP 0.14 all Cats visibility to ¾ SM and increase RNP 0.30 all Cats visibility to 1½ SM.

MALSR

MISSED APPROACH: (Do not exceed 185 K until FIMVI) Climb to 5400 on track 218° to WEBVI, left turn to FIMVI, then track 070° to CAUDE and hold.

ATIS 118.85 350.3	AMARILLO APP CON★ 119.5 307.0	AMARILLO TOWER★ 118.3(CTAF) 257.9	GND CON 121.9 348.6	CLNC DEL 121.65 239.275	UNICOM 122.95
-----------------------------	---	---	-------------------------------	-----------------------------------	-------------------------

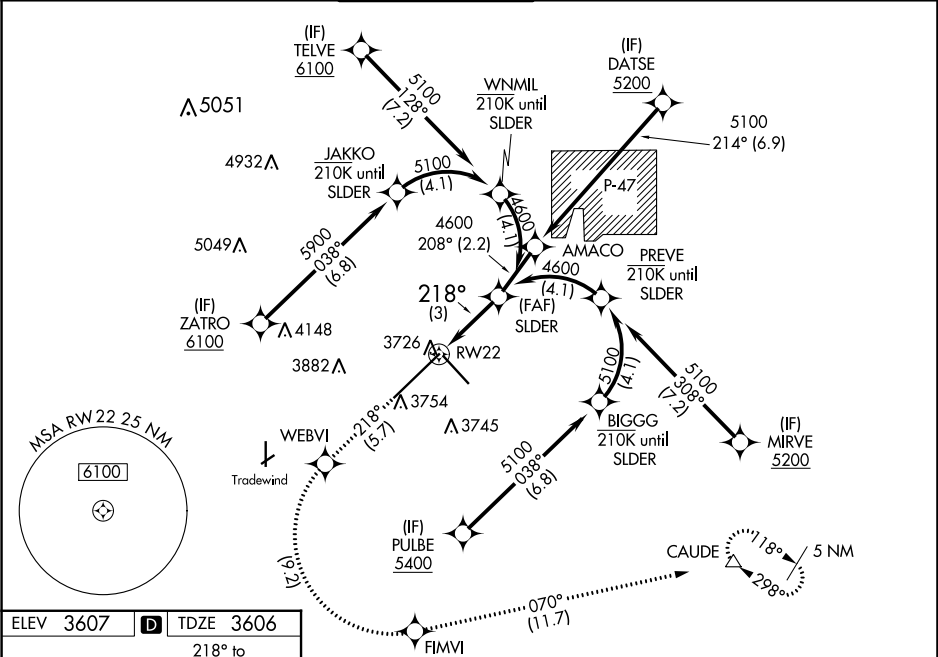

ELEV 3607

D

TDZE 3606

218° to RW22

REIL Rwy 13 and 31

HIRL Rwys 4-22 and 13-31

RNAV 1 - GPS or RADAR REQUIRED

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 77).

5400

WEBVI

FIMVI

CAUDE

See planview for multiple IF locations.

SLIDER

4600

4600

GP 3.00°

TCH 50

CATEGORY	A	B	C	D
RNP 0.14 DA	3884-½	278 (300-½)		
RNP 0.30 DA	3958-¾	352 (400-¾)		

AUTHORIZATION REQUIRED