

TACAN SKE Chan 59 (112.2)	APP CRS 322°	Rwy ldg TDZE 439 Apt Elev 459
--	------------------------	---



TACAN RWY 32L

SCOTT AFB/MIDAMERICA ST LOUIS (BLV)


▲ For inop ALS, increase S-32L Cat C/D/E visibility to 1½ SM.

ALS-F-1 MISSED APPROACH: Climb to 1500 then climbing left turn to 2400 on SKE R-142 to WOMUG/14.1 DME and hold.

ATIS ★ 128.7 256.7	ST LOUIS APP CON 125.2 281.5	SCOTT TOWER 128.25 253.5	GND CON 119.2 275.8	CLNC DEL 119.875 263.025
------------------------------	--	------------------------------------	-------------------------------	------------------------------------

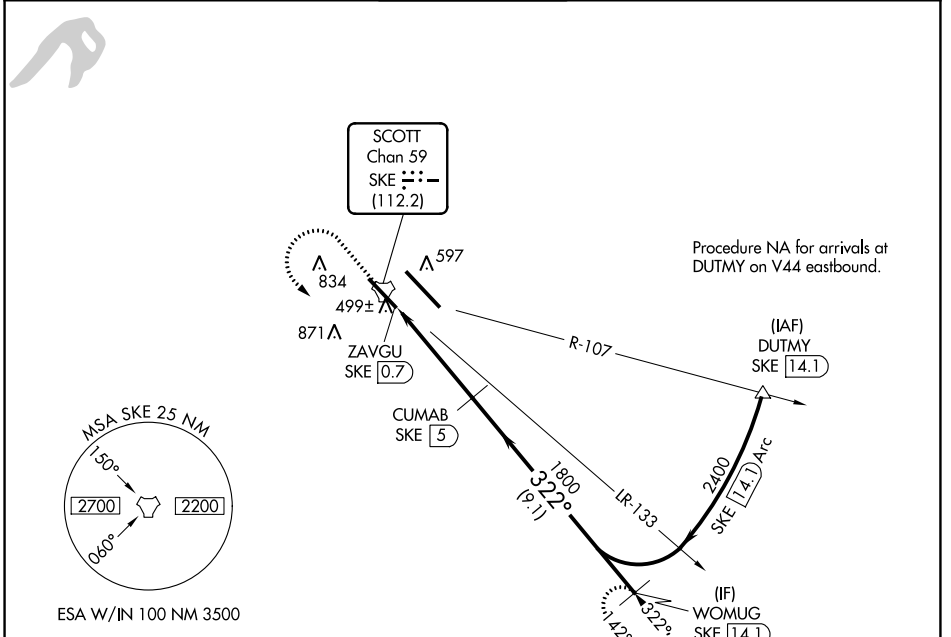

ELEV 459	D	TDZE 439
----------	----------	----------

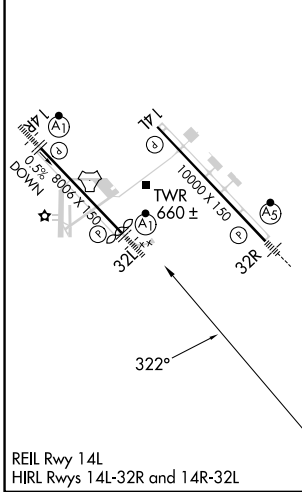

1500


2400

WOMUG SKE 14.1

VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 50).

CUMAB SKE 5

WOMUG SKE 14.1

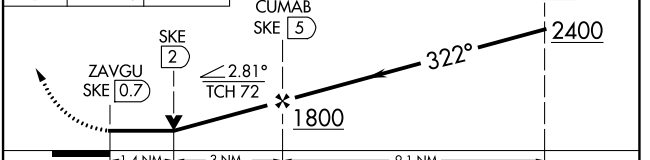

CATEGORY	A	B	C	D	E
S-32L	920/24	481 (500-½)	920/50	481 (500-1)	920/60 481 (500-1½)
C CIRCLING	1000-1 541 (600-1)	1120-1 661 (700-1)	1240-2¼ 781 (800-2¼)	1240-2½ 781 (800-2½)	1240-2¾ 781 (800-2¾)