


RNP AR APCH. RF required.		MALSR	MISSED APPROACH: Climb to 3000 on track 238° to YACUR then, right turn to WADEG, then on track 067° to VLKNN and hold.	
▼ For uncompensated Baro-VNAV systems, procedure NA below -8°C or above 54°C. For inop ALS, increase RNP 0.15 all Cats visibility to 1 3⁄8 and increase RNP 0.30 all Cats visibility to 1 3⁄4 SM.		AS		
ATIS 119.4 270.1	BIRMINGHAM APP CON 123.8 256.8	BIRMINGHAM TOWER 119.9 317.725	GND CON 121.7 348.6	CLNC DEL 125.675 305.2

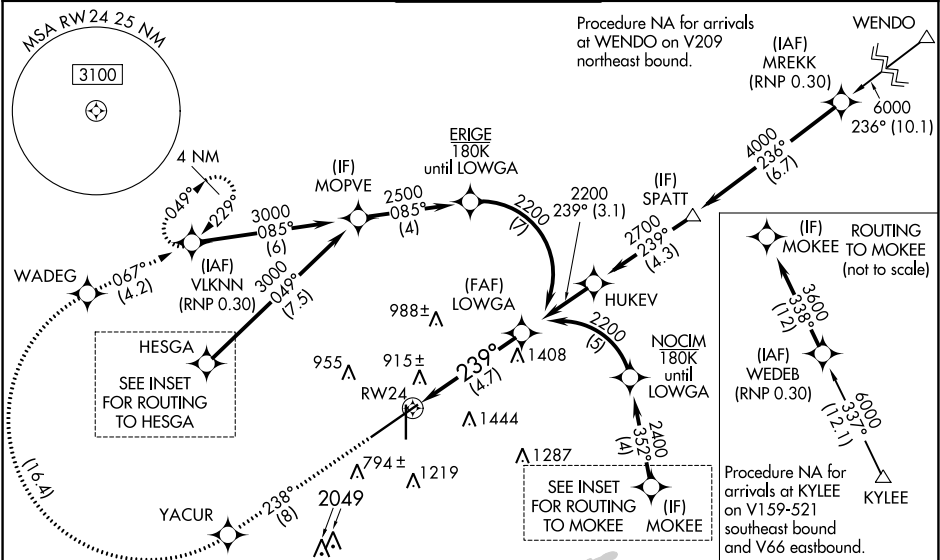

ELEV 650

TDZE 641

REIL Rwy 18 and 36

TDZ/CL Rwy 6

HIRL Rwy 6-24

MIRL Rwy 18-36

851

81

0.7%

DOWN

1200' X 150'

TWR 820

36

7099' X 150'

CRMSN

3000

tr 238°

YACUR

WADEG

tr 067°

VLKNN

LOWGA

2200

239°

See planview for multiple IF locations.

GP 3.00°

TCH 52

4.7 NM

CATEGORY	A	B	C	D
RNP 0.15 DA	1149-1	508 (500-1)		
RNP 0.30 DA	1243-1 3⁄8	602 (600-1 3⁄8)		

AUTHORIZATION REQUIRED