

LOC I-MIA	APP CRS	Rwy ldg	12755
109.5	272°	TDZE	9
		Apt Elev	9

ILS or LOC RWY 27

MIAMI INTL (MIA)


DME required. RNP APCH-GPS. From TUBBZ.

Simultaneous approach authorized.
 Inop table does not apply to S-LOC 27 Cats C/D.
 * RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb to 800 then climbing right turn to 4000 on heading 290° and DHP VORTAC R-335 to BRBRA/DHP 11.5 DME and hold, continue climb-in-hold to 4000.

D-ATIS	MIAMI APP CON	MIAMI TOWER	GND CON	CLNC DEL	CPDLC
ARR 119.15	124.85 322.3	118.3 256.9	121.8 (8L/8R/12/26L/26R) 348.6	135.35	
DEP 133.675			127.5 (9/27/30)		

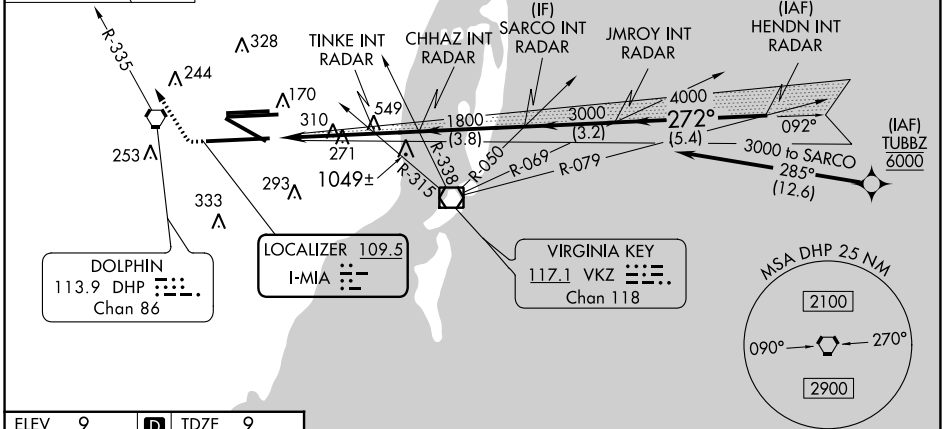

ELEV 9	D	TDZE 9			
TDZ/CL Rwy 8R REIL Rwy 8L and 26R HIRL all Rwys					
FAF to MAP 5.5 NM					
Knots	60	90	120	150	180
Min:Sec	5:30	3:40	2:45	2:12	1:50

800	4000	DHP R-335	BRBRA DHP 11.5	VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 71).	HENDN INT RADAR
CATEGORY	A	B	C	D	
S-ILS 27 *	209/24 200 (200-½)				
S-LOC 27	1300/40 1291 (1300-¾)	1300/55 1291 (1300-1)	1300-3	1291 (1300-3)	
TINKE FIX MINIMUMS (DUAL VOR RECEIVERS OR RADAR REQUIRED)					
S-LOC 27	560/24 551 (600-½)		560/60 551 (600-1¼)		

SE-3, 07 SEP 2023 to 05 OCT 2023

SE-3, 07 SEP 2023 to 05 OCT 2023