

WAAS CH 62810 W02A	APP CRS 019°	Rwy Idg 5503 TDZE 21 Apt Elev 24
--	------------------------	---

RNAV (GPS) RWY 2
SACRAMENTO EXEC (SAC)

RNP APCH-GPS.  For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to 75 SM, increase LNAV all Cats visibility to 1 SM.		MALSR 	MISSED APPROACH: Climb to 440 then climbing left turn to 2000 direct JIRAG and hold.	
ATIS 125.5	NORCAL APP CON 125.25 257.9	EXEC TOWER ★ 119.5 (CTAF) 0 278.8	GND CON 125.0	UNICOM 122.95

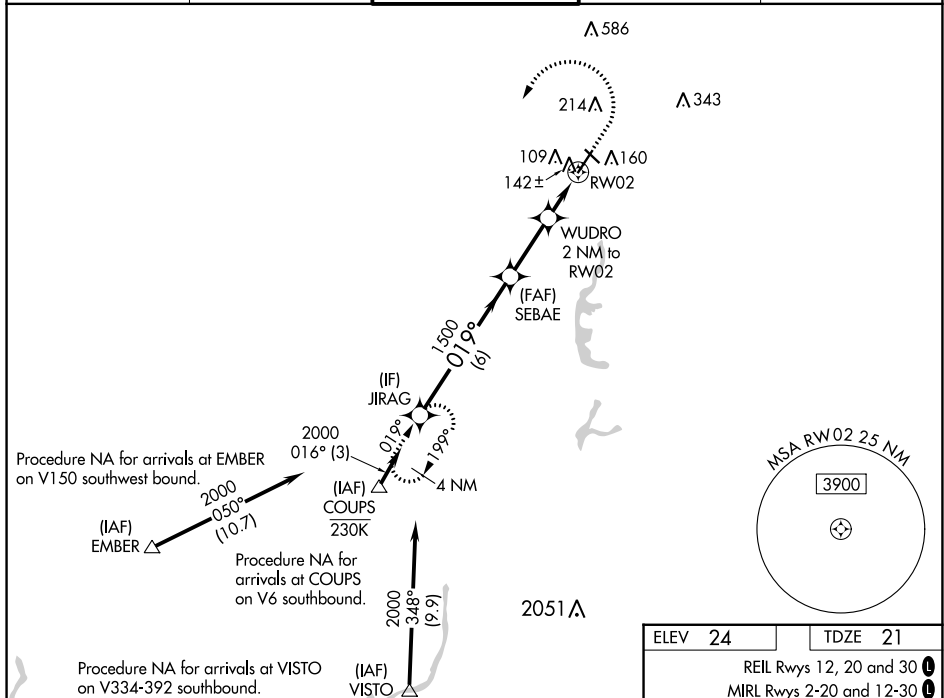


Diagram illustrating a 4th step climb profile. The profile starts at JIRAG (2000 ft) and ends at RW02. Key points include SEBAE (1500 ft), WUDRO (2 NM to RW02), and a 1 NM segment to RW02. The diagram also shows a 4th step climb profile with a 3.00° climb angle and a 57 ft TCH. The diagram is divided into four segments: A (6 NM), B (2.5 NM), C (1 NM), and D (1 NM).