


|                           |                        |                             |   |
|---------------------------|------------------------|-----------------------------|---|
| LOC I-HKY<br><b>108.7</b> | APP CRS<br><b>241°</b> | Rwy Idg<br>TDZE<br>Apt Elev | <b>6401</b><br><b>1190</b><br><b>1190</b> |
|---------------------------|------------------------|-----------------------------|---|


# ILS or LOC RWY 24

HICKORY RGNL (HKY)

**⚠** When local altimeter setting not received, use Morganton altimeter setting and increase all DA 33 feet and all MDA 40 feet. For inop MALSRL, increase S-LOC 24 Cat C/D visibility to 1/2 mile. Circling Rwy 1, 6, 19 NA at night.


**MALSRL**  
 MISSED APPROACH: Climb to 1700 then climbing right turn to 4000 on heading 340° and on BZM VOR/DME R-274 to BZM VOR/DME and hold.


|                        |                                       |   |                         |                          |  |
|------------------------|---------------------------------------|---|-------------------------|--------------------------|--|
| ASOS<br><b>118.325</b> | ATLANTA CENTER<br><b>125.15 263.0</b> | HICKORY TOWER ★<br><b>128.15 (CTAF) 0</b> | GND CON<br><b>121.7</b> | CLNC DEL<br><b>121.7</b> | CLNC DEL<br><b>124.25</b><br>(When twr closed) |
|------------------------|---------------------------------------|---|-------------------------|--------------------------|--|


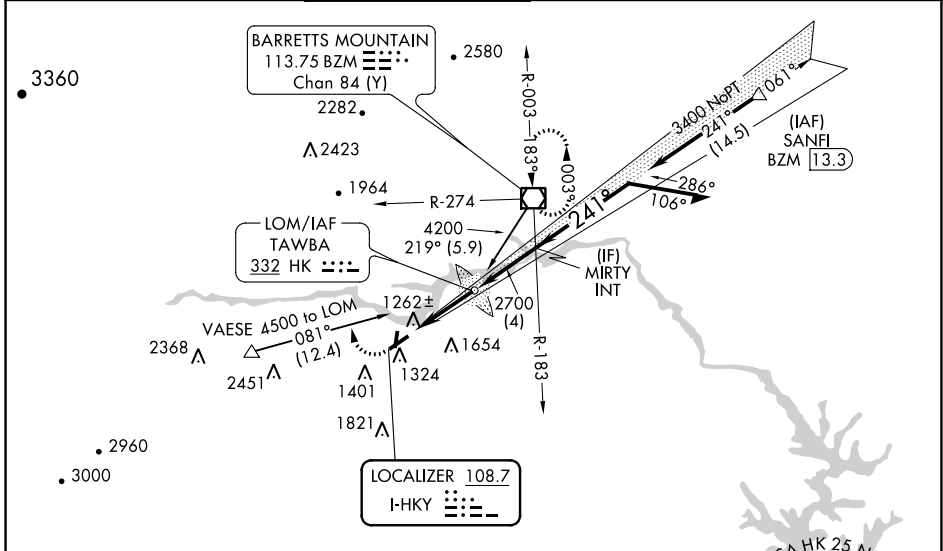


SE-2, 07 SEP 2023 to 05 OCT 2023

SE-2, 07 SEP 2023 to 05 OCT 2023



ALTERNATE MISSED APCH FIX  
TAWBA HK 332  

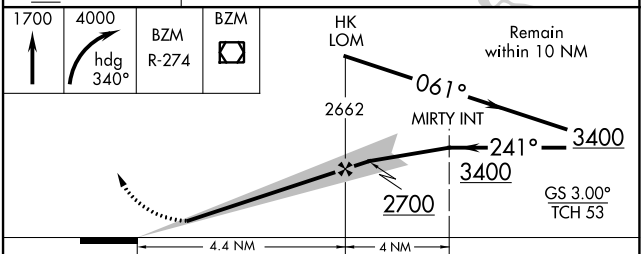


HIRL Rwy 6-24 **1**  
MIRL Rwy 1-19 **1**  
REIL Rwy 1 **1**  
REIL Rwys 6 and 19

FAF to MAP 4.4 NM

|         |      |      |      |      |      |
|---------|------|------|------|------|------|
| Knots   | 60   | 90   | 120  | 150  | 180  |
| Min:Sec | 4:24 | 2:56 | 2:12 | 1:46 | 1:28 |

| CATEGORY | A                      | B                      | C                          | D                          |
|----------|------------------------|------------------------|----------------------------|----------------------------|
| S-ILS 24 | 1390-1/2 200 (200-1/2) |                        |                            |                            |
| S-LOC 24 | 1600-1/2 410 (500-1/2) | 1600-3/4 410 (500-3/4) |                            |                            |
| CIRCLING | 1640-1 450 (500-1)     | 1660-1 470 (500-1)     | 2020-2 1/2 830 (900-2 1/2) | 2020-2 3/4 830 (900-2 3/4) |