


|            |         |          |      |
|------------|---------|----------|------|
| LOC I-TWFF | APP CRS | Rwy Idg  | 8704 |
| 108.3      | 258°    | TDZE     | 4153 |
|            |         | Apt Elev | 4153 |

ILS or LOC RWY 26  
JOSLIN FLD/MAGIC VALLEY RGNL (TWF')

|                                                                                                                                                                                                                                                                                                                                                |       |                                                                                                                                            |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|--------------------------------------------------------------------------------------------------------------------------------------------|
| ADF or DME required.                                                                                                                                                                                                                                                                                                                           | MALSR | MISSED APPROACH: Climb to 4700 then climbing right turn to 7000 on heading 020° and on TWF VORTAC R-349 to TOXEE INT/TWFF 13 DME and hold. |
| ⚠ Circling Rwy 30 NA at night. When local altimeter setting not received, use Jerome altimeter setting: increase S-ILS 26 DA to 4402 feet; increase all MDAs 60 feet and S-LOC 26 visibility Cat C/D/E ½ SM. For inop ALS when using local or Jerome altimeter setting, increase S-ILS 26 Cat E visibility to ¾ SM and S-LOC 26 Cat E to 1 SM. | AS    |                                                                                                                                            |

|         |                      |                      |         |          |        |
|---------|----------------------|----------------------|---------|----------|--------|
| ASOS    | TWIN FALLS APP CON ★ | TWIN FALLS TOWER ★   | GND CON | CLNC DEL | UNICOM |
| 135.025 | 126.7 353.75         | 118.2 (CTAF) 0 317.5 | 121.7   | 123.65   | 122.95 |

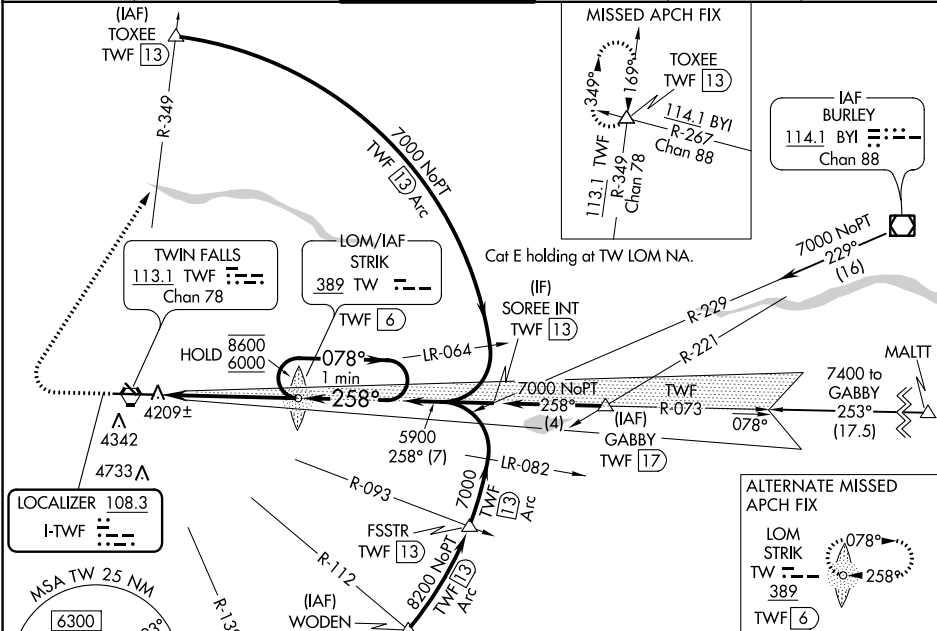

| CATEGORY | A                     | B                     | C                        | D      | E            |
|----------|-----------------------|-----------------------|--------------------------|--------|--------------|
| S-ILS 26 |                       | 4353-½                | 200 (200-½)              |        |              |
| S-LOC 26 |                       | 4480-½                | 327 (400-½)              |        |              |
| CIRCLING | 4700-1<br>547 (600-1) | 4780-1<br>627 (700-1) | 5100-2¾<br>947 (1000-2¾) | 5100-3 | 947 (1000-3) |

|                   |      |      |      |      |      |
|-------------------|------|------|------|------|------|
| REIL Rwy 8        |      |      |      |      |      |
| HIRL Rwy 8-26     |      |      |      |      |      |
| FAF to MAP 5.2 NM |      |      |      |      |      |
| Knots             | 60   | 90   | 120  | 150  | 180  |
| Min:Sec           | 5:12 | 3:28 | 2:36 | 2:05 | 1:44 |