RNAV (GPS) RWY 5

SALISBURY-OCEAN CITY WICOMICO RGNL (SBY)

WAAS CH 62820 W05A	APP CRS 049°	Rwy Idg 5000 TDZE 48 Apt Elev 53

RNP APCH.

T A Baro-VNAV NA when using Georgetown altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 49°C. Visibility reduction by helicopters NA. When local altimeter setting not received use Georgetown altimeter setting: increase LPV DA to 394 feet and increase all Cats visibility ¼ SM; increase LNAV/VNAV DA to 512 feet and all Cats visibility ¼ SM; increase all MDA 60 feet and LNAV Cat C/D and Circling Cat D visibility ¼ SM.

MISSED APPROACH: Climb to 2000 direct OKKOE and hold.

ASOS	PATUXENT APP CON ★	SALISBURY TOWER ★	GND CON	CLNL DEL ★	UNICOM
118.325	127.95 314.0	119.425 (CTAF) L	123.775	123.775	122.95

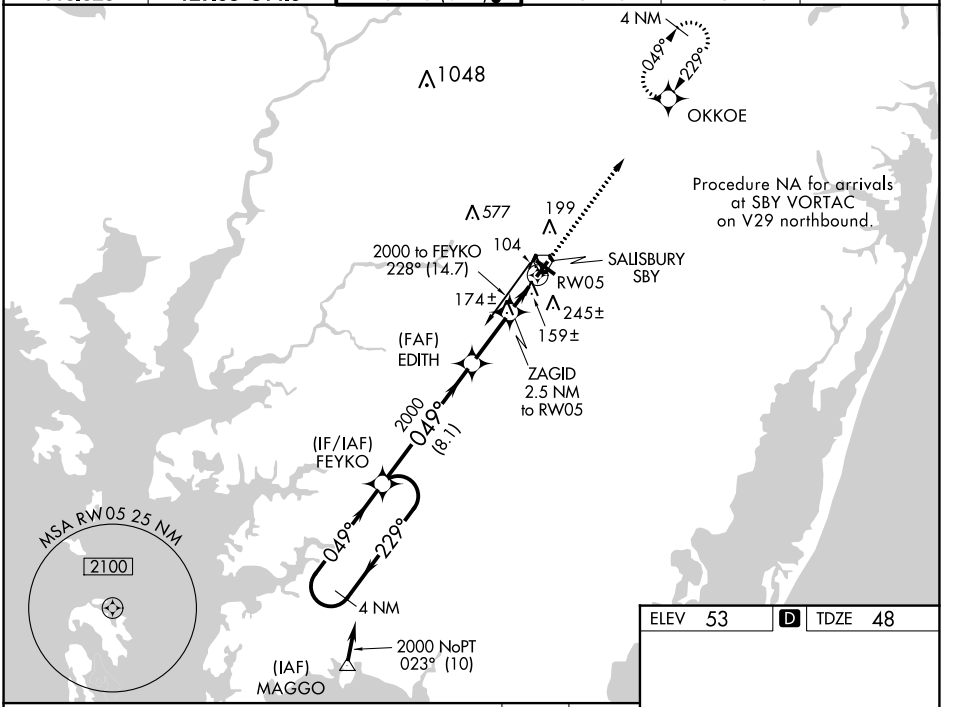

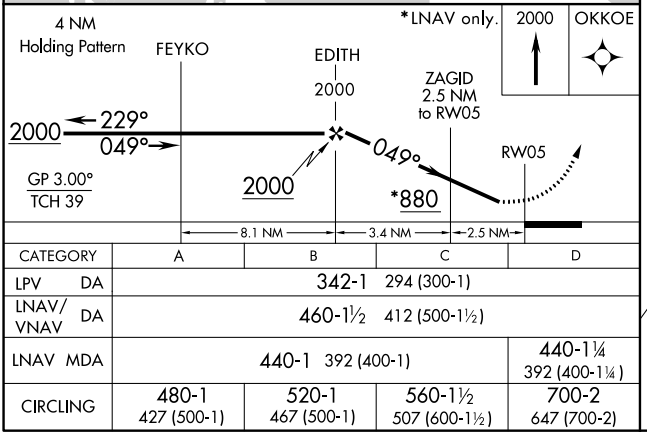

CATEGORY	A	B	C	D
LPV DA	342-1 294 (300-1)			
LNAV/VNAV DA	460-1½ 412 (500-1½)			
LNAV MDA	440-1 392 (400-1)			440-1¼ 392 (400-1¼)
CIRCLING	480-1 427 (500-1)	520-1 467 (500-1)	560-1½ 507 (600-1½)	700-2 647 (700-2)

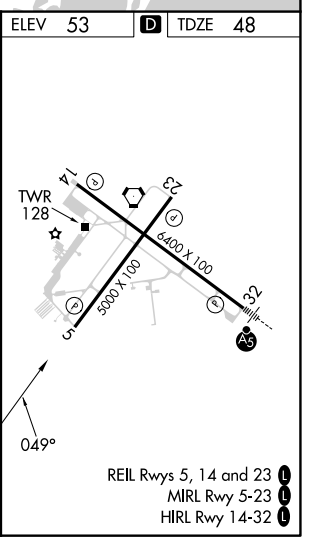

REIL Rwys 5, 14 and 23 L
MIRL Rwy 5-23 L
HIRL Rwy 14-32 L

NE-3, 07 SEP 2023 to 05 OCT 2023
NE-3, 07 SEP 2023 to 05 OCT 2023