
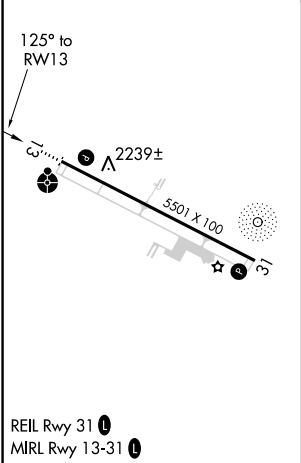


RNP APCH.		ODALS	MISSED APPROACH: Climb to 5400 direct ZASNO and hold, continue climb-in-hold to 5400.
Rwy 13 helicopter visibility reduction below 1 SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. Inop table does not apply to LPV all Cats, LNAV/VNAV all Cats, and LNAV Cats A and B.			
AWOS-3 133.325	ROANOKE APP CON 126.9 339.8	CLNC DEL 124.85	UNICOM 123.05 (CTAF) 0

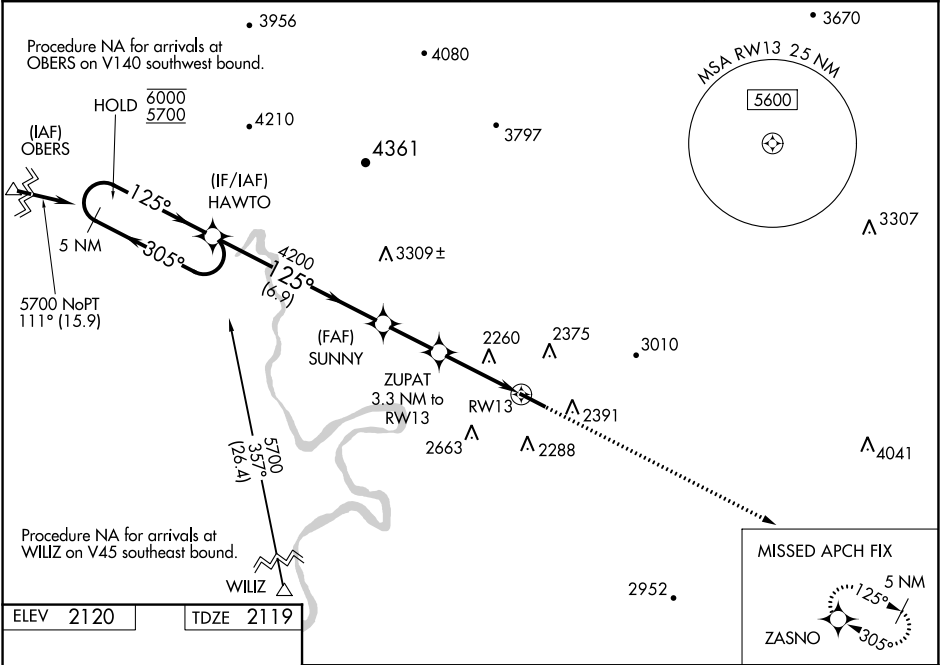

5 NM Holding Pattern HAWTO		SUNNY		ZUPAT 3.3 NM to RW13		5400		ZASNO	
6000 ← 305°		4200		*0.9 NM to RW13		↑		✴	
5700 → 125°		4200		*3380		*LNAV only			
GP 3.44° TCH 55		4200		RW13					
		6.9 NM		2.2 NM		2.4		0.9	
CATEGORY		A		B		C		D	
LPV DA		2389-1		270 (300-1)				NA	
LNAV/VNAV DA		2419-1		300 (300-1)				NA	
LNAV MDA		2520-1		401 (400-1)				NA	
CIRCLING		2760-1 640 (700-1)		2820-1 700 (700-1)		2980-2½ 860 (900-2½)		NA	