

WAAS CH <b>42900</b> <b>W33A</b>	APP CRS <b>333°</b>	Rwy Idg TDZE Apt Elev <b>6001</b> <b>82</b> <b>82</b>
--	------------------------	--


# RNAV (GPS) RWY 33

KISSIMMEE GATEWAY (ISM)

**Baro-VNAV NA** when using Orlando Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1.5°C (5°F) or above 43°C (109°F). Helicopter visibility reduction below ¼ SM NA. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Orlando Intl altimeter setting and increase all LPV DA to 359, all LNAV/VNAV DA to 429, and all MDA 40 feet; increase LNAV/VNAV all Cats visibility ½ SM, LNAV Cat C/D and Circling Cat C visibility ¼ SM.


**MISSED APPROACH:** Climb to 540 then climbing left turn to 2000 direct CAMBE and hold.

ATIS <b>128.775</b>	ORLANDO APP CON <b>119.4 351.9</b>	KISSIMMEE TOWER * <b>124.45</b> (CTAF)	CLNC DEL <b>121.7</b>	CLNC DEL <b>123.95</b> (when twr closed)	GND CON <b>121.7</b>	UNICOM <b>122.95</b>
------------------------	---------------------------------------	---	--------------------------	--	-------------------------	-------------------------

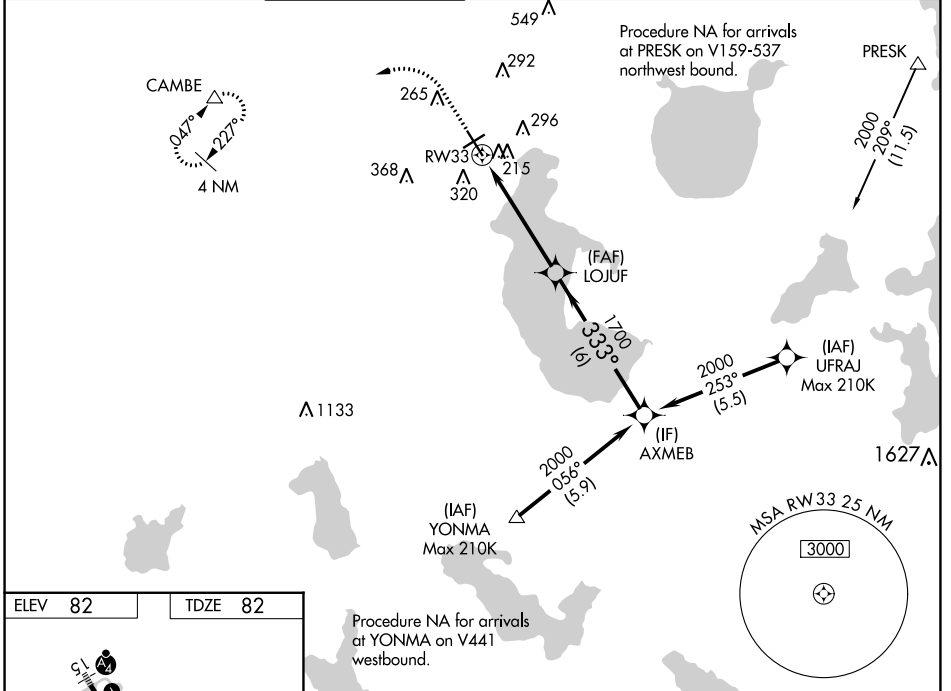

SE-3, 07 SEP 2023 to 05 OCT 2023

SE-3, 07 SEP 2023 to 05 OCT 2023

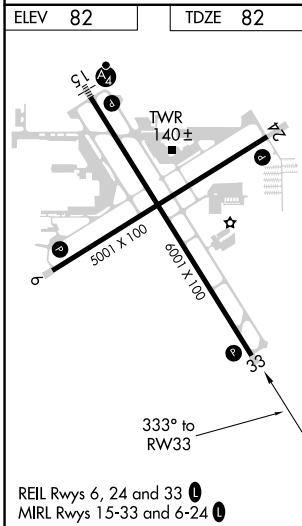

540	2000	CAMBE	AXMEB	
RW33		LOJUF	AXMEB	
5 NM		6 NM		
1700	333°	2000		
		GP 3.00°	TCH 45	
CATEGORY	A	B	C	D
LPV DA	332-1		250 (300-1)	
LNAV/VNAV DA	402-1		320 (400-1)	
LNAV MDA	480-1 398 (400-1)		480-1½ 398 (400-1½)	
CIRCLING	620-1 538 (600-1)		680-1½ 700-2 598 (600-1½) 618 (700-2)	