

LOC I-HSA <u>110.35</u>	APP CRS 182°	Rwy Idg 8498 TDZE 23 Apt Elev 23
-----------------------------------	------------------------	---

ILS Y or LOC Y RWY 18
STENNIS INTL (HSA)




A Circling NA for Cat E west of Rwy 18-36. When local alimeter setting not received, use Gulfport alimeter setting: increase D/A to 270 feet; increase all MDA 60 feet and S-L0C 18 Cats C/D/E visibility $\frac{1}{8}$ mile, Circling Cat C visibility $\frac{1}{8}$ mile and Cats D/E visibility $\frac{1}{4}$ mile. WUDGU fix minimums: increase S-L0C 18 Cats C/D/E visibility $\frac{1}{8}$ mile, and Circling Cats D/E visibility $\frac{1}{4}$ mile. For inop MALSR, increase S-L18 Cat E visibility to $\frac{3}{4}$ mile, and S-L0C 18 Cats C/D/E visibility to $\frac{1}{8}$ mile. WUDGU fix minimums: increase S-L0C 18 Cats C/D/E visibility to 1 mile. For inop MALSR when using Gulfport alimeter setting, increase S-L18 Cat E visibility to $\frac{3}{4}$ mile and S-L0C 18 Cat E visibility to $\frac{1}{8}$ mile. WUDGU fix minimums: increase S-L0C 18 Cat E visibility to $\frac{1}{4}$ mile.

MALSR
A5

MISSED APPROACH:
Climb to 700 then
climbing left turn to
2000 on heading
360° and on GPT
VORTAC R-298 to
STENN and hold.

AWOS-3PT 118.375	GULFPORT APP CON★ 124.6 354.1 (130°-309°) 127.5 254.25 (310°-129°)	STENNIS TOWER ★ 127.15 (CTAF) 0 229.4	GND CON 121.725 229.4	UNICOM 122.95
----------------------------	--	---	---------------------------------	-------------------------

GPS REQUIRED

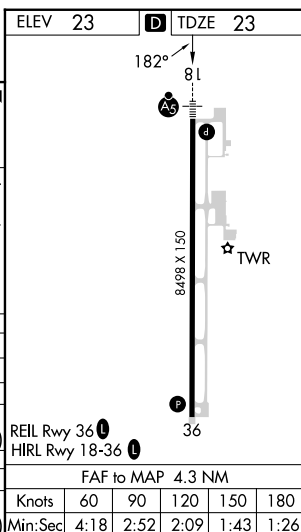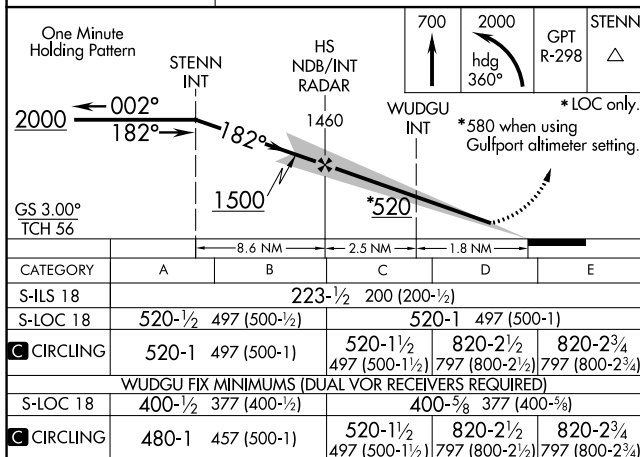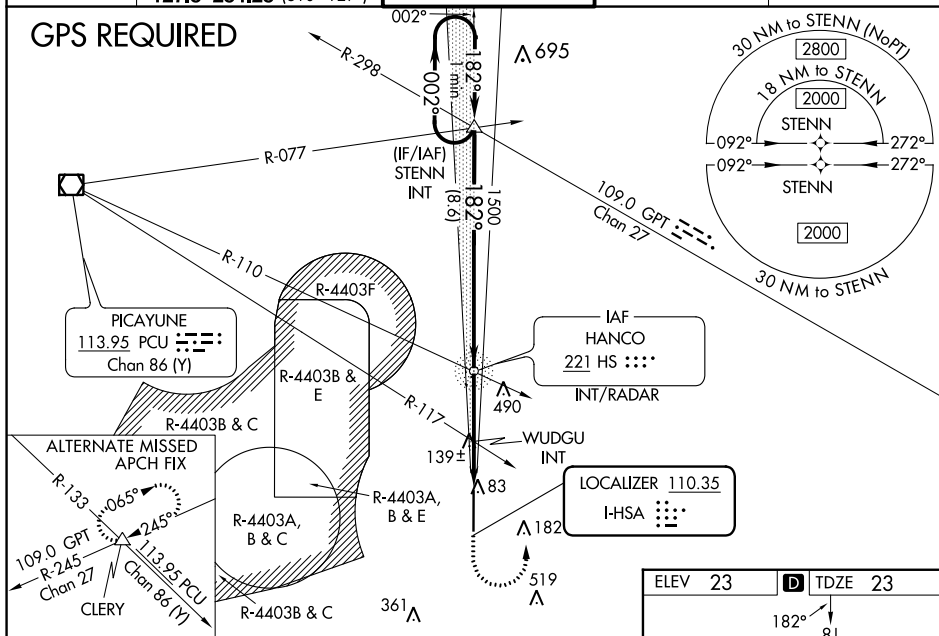

STENNIS INTL (HSA)

ILS Y or LOC Y RWY 18

SC-4, 07 SEP 2023 to 05 OCT 2023

SC-4, 07 SEP 2023 to 05 OCT 2023