

WAAS CH 78228 W07A	APP CRS 071°	Rwy Idg TDZE 5001 775 Apt Elev 781
--	------------------------	--

RNAV (GPS) RWY 7


ROCHELLE MUNI/KORITZ FLD (RPJ)

⚠

Baro-VNAV NA when using Chicago/Rockford Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Chicago/Rockford Intl altimeter setting: increase all DA to 1073 feet and all MDA 60 feet; increase LNAV visibility Cats C/D ¼ mile; increase Circling Cat C visibility ¼ mile. VDP NA when using Chicago/Rockford Intl altimeter setting.

MISSED APPROACH:
Climb to 2600 direct
BELDE and hold.

AWOS-3 125.2	ROCKFORD APP CON 126.0 327.0	UNICOM 122.975 (CTAF)
------------------------	--	---------------------------------

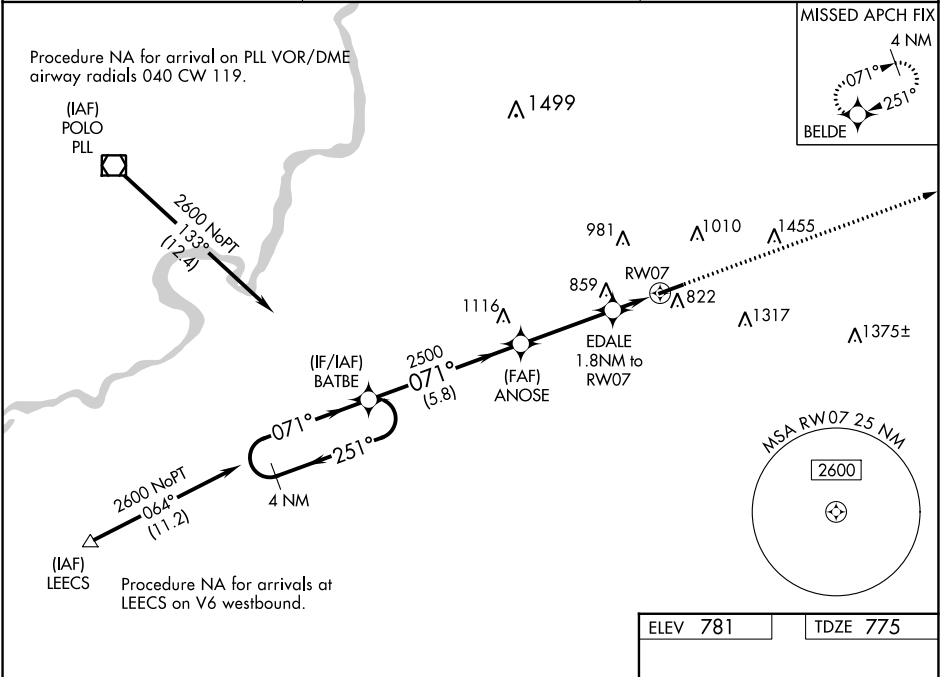

VGSI and RNAV glidepath not coincident
(VGSI Angle 3.00°/TCH 22).

4 NM Holding Pattern
2600
251°
071°
GP 3.00°
TCH 40

BATBE
ANOSE
EDALE 1.8 NM to RW07
*1 NM to RW07
RW07

2600 BELDE
*LNAV only

5.8 NM 3.5 NM 0.8 NM 1 NM

CATEGORY	A	B	C	D
LPV DA		1025-1	250 (300-1)	
LNAV/VNAV DA		1025-1	250 (300-1)	
LNAV MDA		1120-1	345 (400-1)	
CIRCLING	1260-1 479 (500-1)	1360-1 579 (600-1)	1680-2¾ 899 (900-2¾)	1820-3 1039 (1100-3)

MIRL Rwy 7-25
REIL Rws 7 and 25