
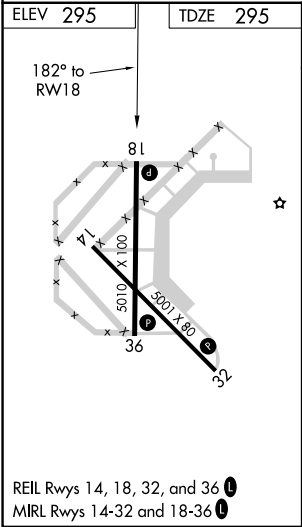


WAAS CH 78315 W18A	APP CRS 182°	Rwy Idg TDZE 295 Apt Elev 295	5010
--	------------------------	---	-------------

RNAV (GPS) RWY 18

MALDEN RGNL (M.A.W)

RNP APCH-GPS.		MISSED APPROACH: Climb to 2100 direct DROSS and hold.	
▼ ▲ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C.			
AWOS-3PT 119.825	MEMPHIS CENTER 133.65 292.15	GCO 135.075	UNICOM 122.8 (CTAF) 0

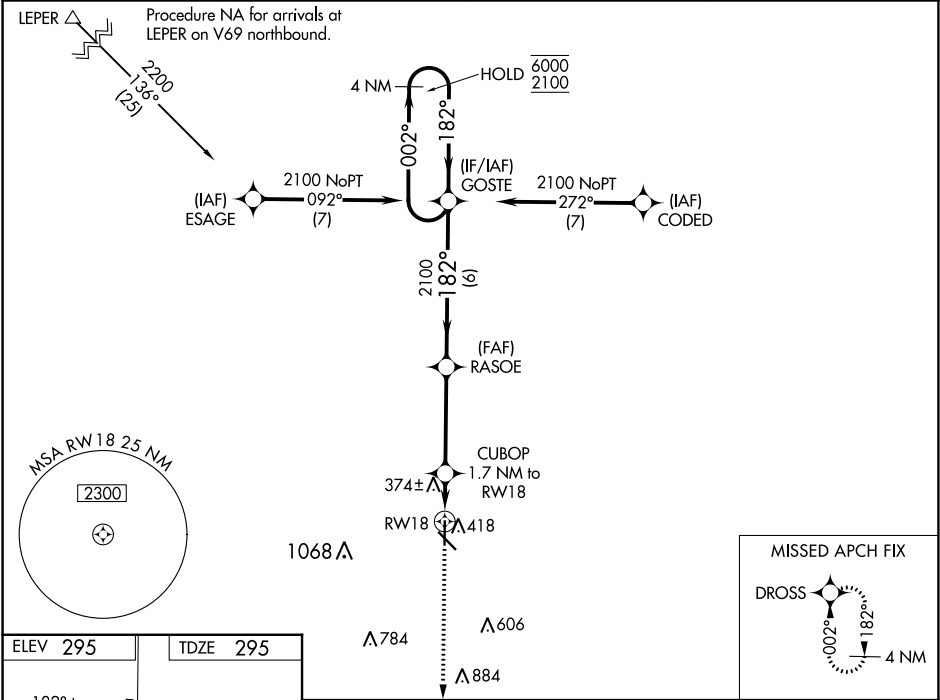

2100

DROSS

CUBOP

1.7 NM to RW18

1 NM to RW18

880

182°

2100

002°

6000

182°

2100

GP 3.00°

TCH 40

4 NM Holding Pattern

2100

RASOE

GOSTE

1 NM

0.8

3.8 NM

6 NM

CATEGORY	A	B	C	D
LPV DA	495-1 200 (200-1)			NA
LNAV/VNAV DA	545-1 250 (300-1)			NA
LNAV MDA	640-1 345 (400-1)			NA
CIRCLING	720-1 425 (500-1)	800-1 505 (600-1)	800-1½ 505 (600-1½)	NA