

WAAS CH 70711 W34A	APP CRS 340°	Rwy Idg 7100 TDZE 1232 Apt Elev 1232
--	------------------------	---

RNAV (GPS) RWY 34

BRAINERD LAKES RGNL (BRD)

RNP APCH.

T Baro-VNAV and VDP NA when using Aikin alimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. When local alimeter setting not received, use Aikin alimeter setting; increase LPV DA to 1484, LNAV/VNAV DA to 1636 and LNAV/VNAV visibility ¼ SM; increase all MDAs 60 feet and LNAV Cats C and D visibility ¼ SM. For inop ALS when using Aikin alimeter setting, increase LNAV Cat D visibility to 1½ SM.

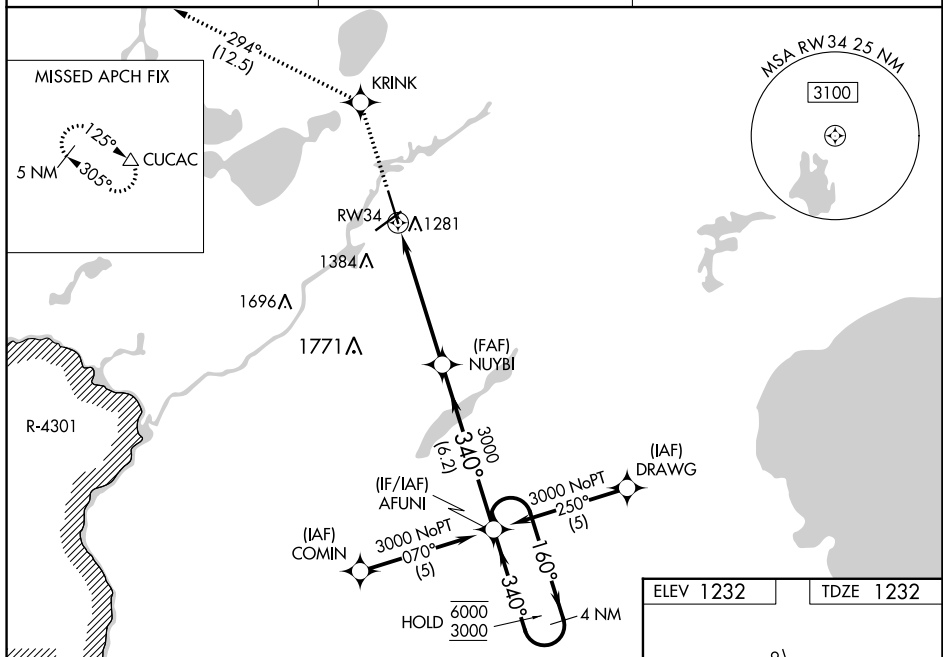
MALSR



MISSED APPROACH:
Climb to 3300 direct
KRINK and on track 294°
to CUCAC and hold.

ASOS
126.775

MINNEAPOLIS CENTER
118.05 239.0

UNICOM
122.7 (CTAF) **L**

3300 ↑		KRINK ✱		tr 294°		CUCAC △		NUYBI ✱		AFUNI 		4 NM Holding Pattern 160° → 6000 ← 340° 3000 GP 3.00° TCH 46	
*LNAV only				*1 NM to RW34									
RW34		1 NM		4.3 NM		6.2 NM							
CATEGORY		A		B		C		D					
LPV DA				1432-1/2		200 (200-1/2)							
LNAV/ VNAV DA				1584-3/4		352 (400-3/4)							
LNAV MDA		1620-1/2		388 (400-1/2)		1620-5/8 388 (400-5/8)		1620-1 388 (400-1)					
C CIRCLING		1760-1		528 (600-1)		1760-1 1/2 528 (600-1 1/2)		1860-2 628 (700-2)					

