

WAAS CH 99620 W30A	APP CRS 303°	Rwy Idg TDZE Apt Elev	5001 2294 2296
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 30
WOKAL FLD/GLASGOW-VALLEY COUNTY (GGW)

RNP APCH.


For uncompensated Baro-VNAV systems, LNAV-VNAV NA below -14°C or above 54°C. When local altimeter setting not received, use Wolf Point altimeter setting and increase LPV DA to 2635 feet and all visibilities $\frac{3}{8}$ SM; increase LNAV/VNAV DA to 2728 feet and all visibilities $\frac{1}{2}$ SM; increase all MDAs 160 feet and LNAV Cats C/D and Circling Cat D visibility $\frac{1}{2}$ SM, Circling Cat C $\frac{1}{4}$ SM. Baro-VNAV and VDP NA when using Wolf Point altimeter setting.

MISSED APPROACH:
Climb to 6500 direct
CETAD and on track
261° to KEEVR and
hold.

ASOS 135.175	SALT LAKE CENTER 126.85 305.2	UNICOM 122.8 (CTAF) 0
------------------------	---	---------------------------------

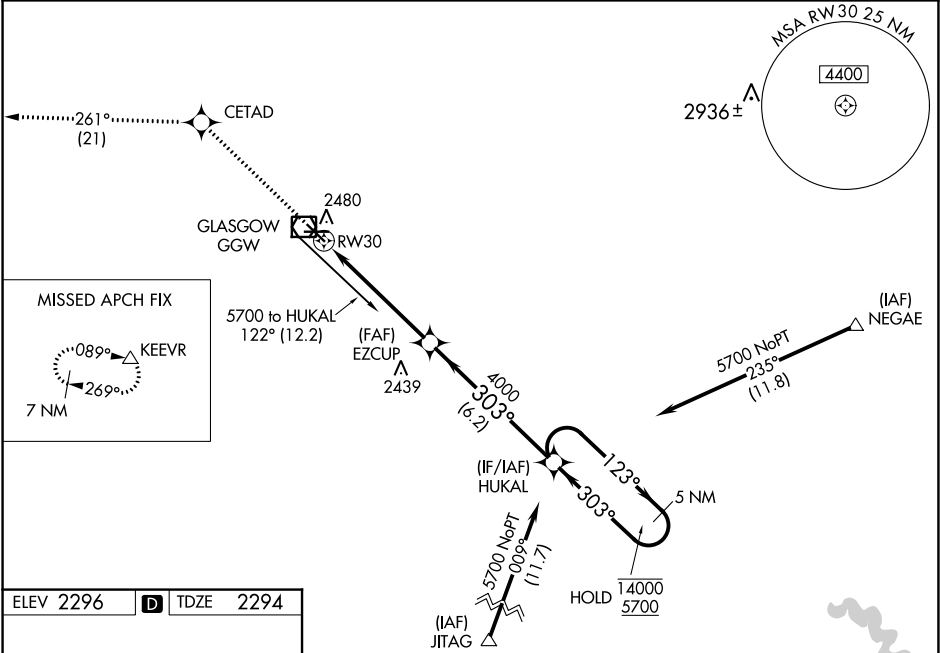

ELEV 2296	D	TDZE 2294
-----------	----------	-----------

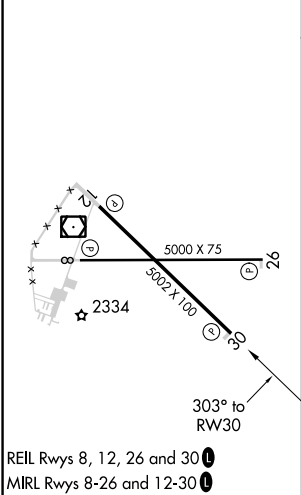

6500	CETAD	tr 261°	KEEVR	HUKAL	5 NM Holding Pattern
* LNAV only					
* 1.2 NM to RWY 30					
RWY 30					
1.2 NM 4.1 NM 6.2 NM					
CATEGORY	A	B	C	D	
LPV DA	2494- $\frac{3}{4}$ 200 (200- $\frac{3}{4}$)				
LNAV/VNAV DA	2587-1 293 (300-1)				
LNAV MDA	2700-1	406 (500-1)	2700-1 $\frac{1}{8}$	406 (500-1 $\frac{1}{8}$)	
CIRCLING	2780-1	484 (500-1)	2780-1 $\frac{1}{2}$ 484 (500-1 $\frac{1}{2}$)	2900-2 604 (700-2)	

NW-1, 02 NOV 2023 to 30 NOV 2023

NW-1, 02 NOV 2023 to 30 NOV 2023