

WAAS CH 99503 W27A	APP CRS 270°	Rwy Idg TDZE 17 Apt Elev 17	6500
--	------------------------	---	-------------

RNAV (GPS) RWY 27
GULF SHORES INTL/JACK EDWARDS FLD (JKA)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Pensacola Intl altimeter setting.


⚠ Circling Rwy 17, 35 NA at night. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Pensacola Intl altimeter setting and increase LPV DA to 295 feet; increase LNAV/VNAV DA to 559 feet and all visibilities ¼ SM; increase all MDAs 80 feet and visibility Cts C and D ¼ SM. For inop ALS, increase LNAV Cat C/D visibility to 1½ SM. For inop ALS, when using Pensacola Intl altimeter setting minimums, increase LPV all Cts visibility to ¾ SM, increase LNAV Cts C/D visibility to 1½ SM.

MALSR




MISSED APPROACH:
Climb to 2500 direct VUSRY and hold.

ATIS 134.525	PENSACOLA APP CON 120.65 270.8	GULF SHORES TOWER ★ 118.65 (CTAF) 0	CLNC DEL 121.7	CLNC DEL 124.55 (When twr dcd)	GND CON 121.7	UNICOM 122.7
------------------------	--	--	--------------------------	--	-------------------------	------------------------

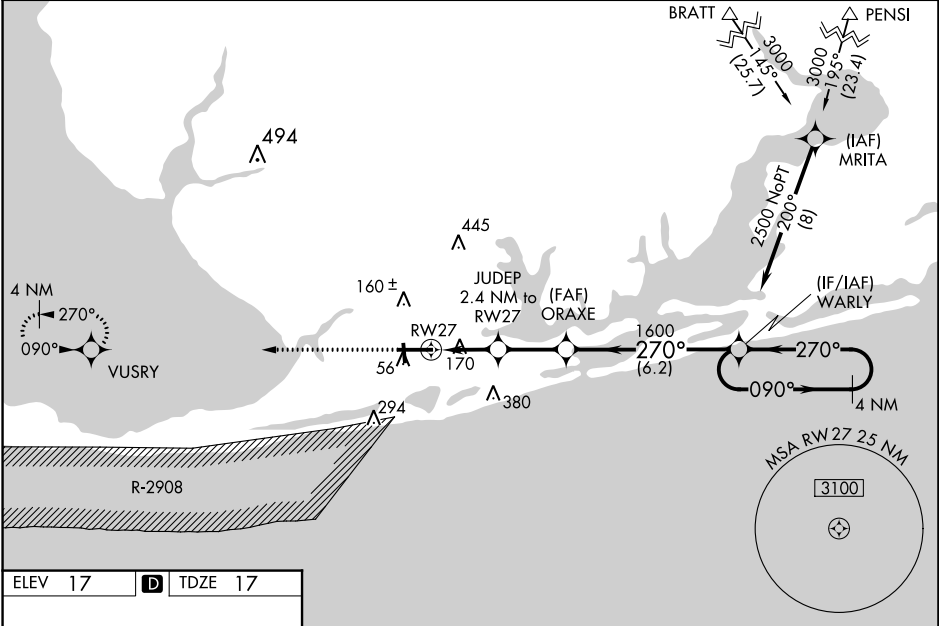

ELEV **17** **D** TDZE **17**



MIRL Rwy 17-35 **0**
HIRL Rwy 9-27 **0**

2500 ↑ VUSRY		4 NM Holding Pattern			
*LNAV only.		GP 3.00° TCH 47			
JUDEP 2.4 NM to RW27		ORAXE 1600		WARLY	
*1.1 NM to RW27		270°		090° → 2500 ← 270°	
RW27		1600			
1.1 1.3		2.4 NM		6.2 NM	
CATEGORY	A	B	C	D	
LPV DA	217-½ 200 (200-½)				
LNAV/VNAV DA	481-1⅞ 464 (500-1⅞)				
LNAV MDA	420-½ 403 (500-½)		420-¾ 403 (500-¾)		
CIRCLING	480-1 463 (500-1)		740-2 723 (800-2)		740-2¼ 723 (800-2¼)

SE-4, 02 NOV 2023 to 30 NOV 2023

SE-4, 02 NOV 2023 to 30 NOV 2023