

WAAS CH 73006 W03A	APP CRS 032°	Rwy Idg 10165 TDZE 5328 Apt Elev 5344
--	------------------------	--

RNAV (GPS) RWY 3

CASPER/NATRONA COUNTY INTL (CPR)

▼


▲

For inoperative MALSR, increase LPV all Cats visibility to 1 mile.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -25°C (-13°F) or above 38°C (100°F).
DME/DME RNP-0.3 NA.

MALSR

MISSED APPROACH: Climb to 7500 direct KIVSE and via track 022° to DDY VOR/DME and hold.

ATIS 126.15	CASPER APP CON ★ 120.65 354.1	CASPER TOWER ★ 118.3 (CTAF) 0 257.8	GND CON 121.9	CLNC DEL 121.9 257.8	UNICOM 122.95
-----------------------	---	---	-------------------------	--------------------------------	-------------------------

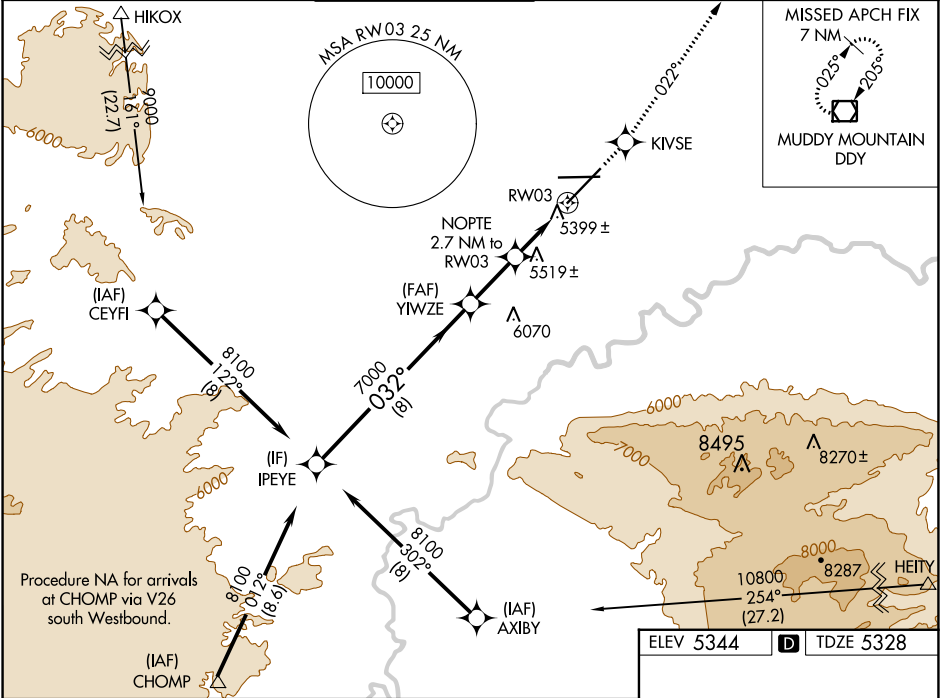

Procedure Turn NA	IPEYE		YIWZE		NOPT 2.7 NM to RW03		KIVSE		tr 022°		DDY			
	8100		7000		*6240		*1.3 NM to RW03		*LNAV only					
GP 3.00° TCH 52		8 NM		2.3 NM		1.4 NM		1.3 NM						
CATEGORY	A		B		C		D							
LPV DA			5643/24		315 (300-½)									
LNAV/ VNAV DA			5691/40		363 (400-¾)									
LNAV MDA	5780/24		452 (500-½)		5780/40 452 (500-¾)		5780/50 452 (500-1)							
CIRCLING	5780-1 436 (500-1)		5800-1 456 (500-1)		5860-1½ 516 (600-1½)		6200-2¾ 856 (900-2¾)							

