


CHARLOTTE, NORTH CAROLINA

NOTE: Accelerate to 250K, if unable advise ATC.
Upon reaching 10000 MSL, accelerate to and maintain 280K, if unable advise ATC.

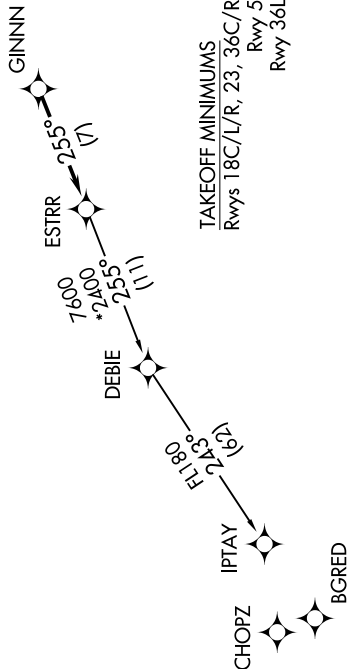

Rwys 18C/L/R, 23, 36C/R: Standard with minimum climb of 500' per NM to 1260.
 Rwy 5: Standard with minimum climb of 500' per NM to 1300.
 Rwy 36L: Standard with minimum climb of 500' per NM to 1400.

NOTE: Chart not to scale.