


WAAS CH 65614 W04A	APP CRS 047°	Rwy Idg TDZE 619 Apt Elev 620
--	------------------------	---

RNAV (GPS) Z RWY 4R

CHICAGO MIDWAY INTL (MDW)

RNP APCH - GPS	MISSED APPROACH: Climb to 1100 then climbing right turn to 2600 direct EON VORTAC and hold.
Circling Rwy 31R NA at night. Rwy 4R helicopter visibility reduction below RVR 4000 NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C.	

D-ATIS 132.75	CHICAGO APP CON 128.2 353.875	MIDWAY TOWER 135.2 269.125	GND CON 118.075	CLNC DEL 124.625	CPDLC
-------------------------	---	--------------------------------------	---------------------------	----------------------------	-------

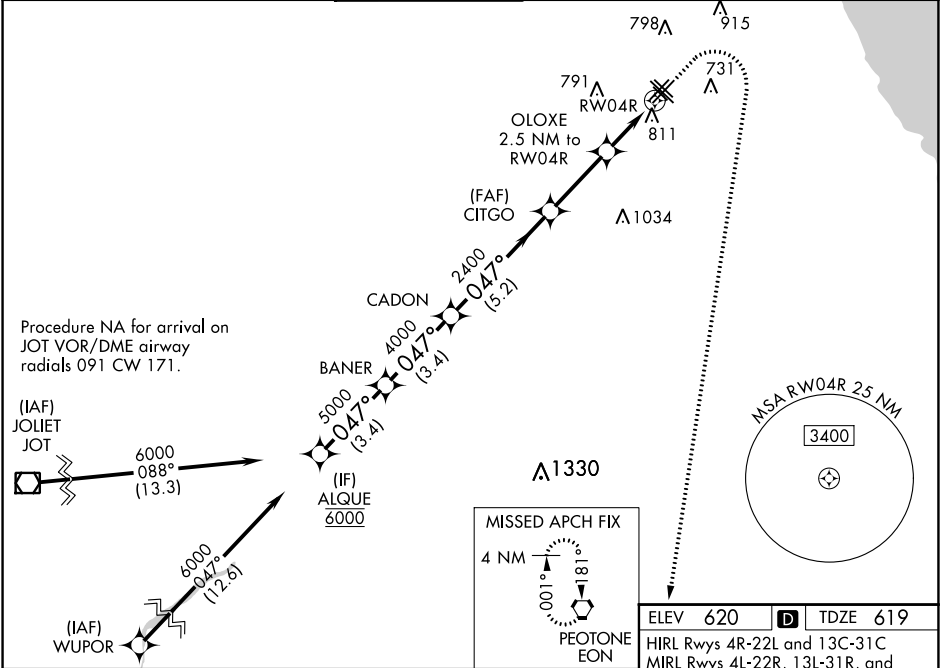

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 66).				
ALQUE	BANER	CADON	CITGO	OLOXE
6000	5000	4000	2400	1460
GP 3.00° TCH 50				
→3.4 NM→	→3.4 NM→	→5.2 NM→	→2.9 NM→	→1.3 NM→
→1.2 NM→				
CATEGORY	A	B	C	D
LPV DA		869/40	250 (300-¾)	
LNAV/VNAV DA		1097-1⅓	478 (500-1⅓)	
LNAV MDA	1080/55	461 (500-1)	1080-1⅓	461 (500-1⅓)
CIRCLING	1120-1	500 (500-1)	1340-2 720 (800-2)	1340-2¼ 720 (800-2¼)

