


APP CRS	Rwy Idg	9000
058°	TDZE	773
	Apt Elev	799


RNAV (RNP) Z RWY 6L
CLEVELAND-HOPKINS INTL (CLE)

RNP AR APCH.	For uncompensated Baro-VNAV systems, procedure NA below -18°C (0°F) or above 54°C (130°F). For inop ALS, increase RNP 0.17 all Cats visibility to RVR 5500 and RNP 0.30 all Cats visibility to RVR 6000.	ALSF-2	MISSED APPROACH: Climb to 3000 direct ACAPO and on track 001° to PASLE and hold.
--------------	--	--------	--

D-ATIS ARR 127.85 DEP 132.375	CLEVELAND APP CON 126.55 346.325	CLEVELAND TOWER 124.5 273.45	GND CON 121.7 273.45	CLNC DEL 125.05 273.45	CPDLC
-------------------------------------	-------------------------------------	---------------------------------	-------------------------	---------------------------	-------

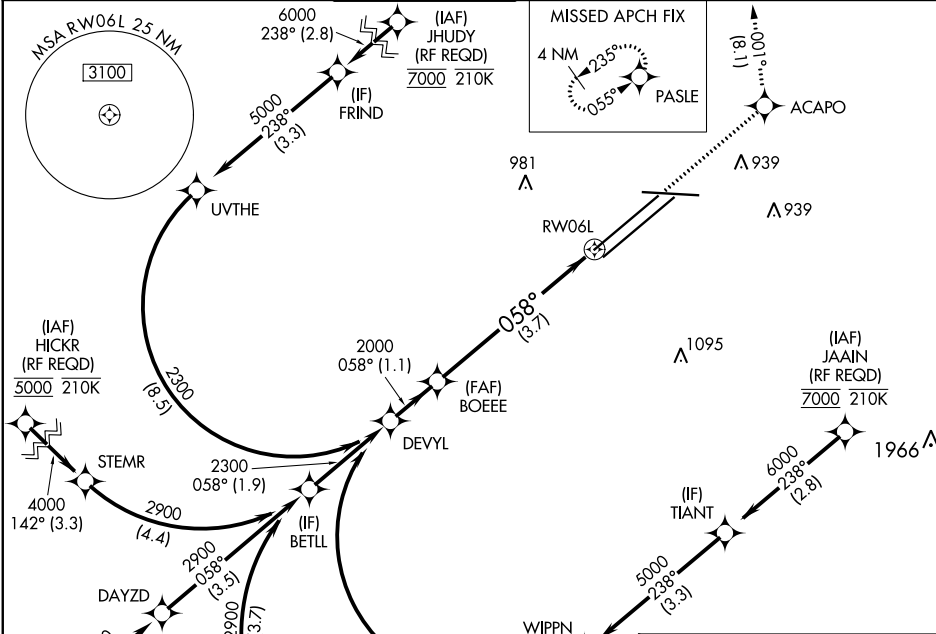


ELEV 799	TDZE 773
----------	----------

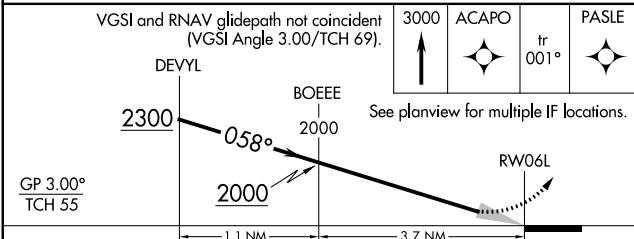

CATEGORY	A	B	C	D
RNP 0.17 DA	1123/30	350 (400-5%)		
RNP 0.30 DA	1176/40	403 (400-3/4)		

AUTHORIZATION REQUIRED

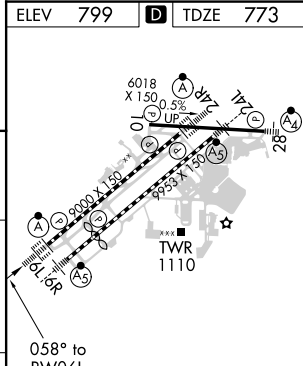

REIL Rwy 10
TDZ/CL Rwy 6L, 6R, 24L, and 24R
HIRL Rwy 6L-24R, 6R-24L and 10-28