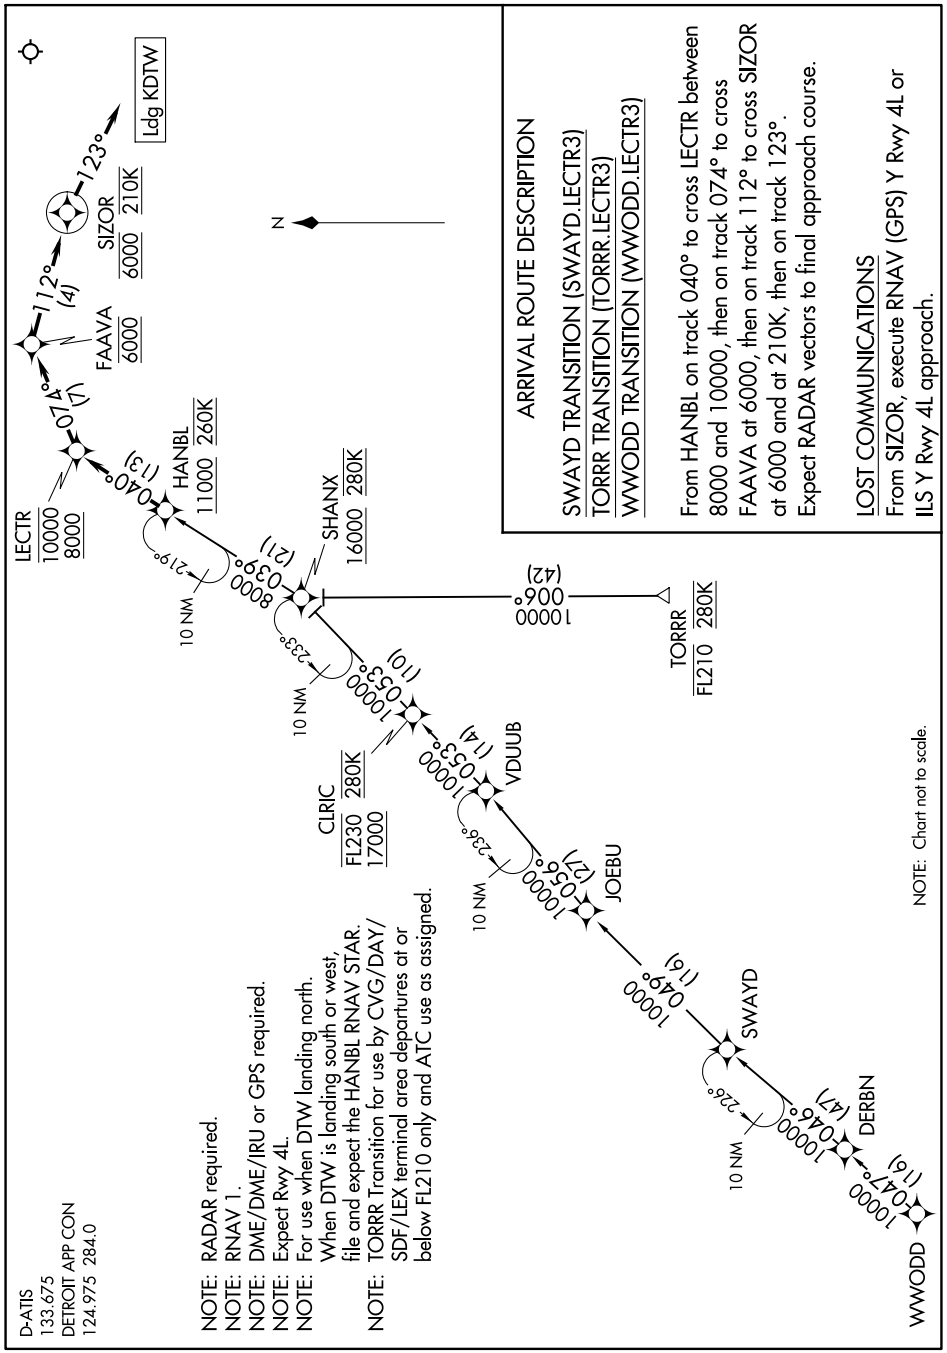
LECTR
10000
8000
074°
(7)
FAAVA
6000
112°
(4)
SIZOR
6000 210K
123°
Ldg KDTW
040°
(13)
HANBL
11000 260K
219°
10 NM
8000
039°
(21)
SHANX
16000 280K
233°
10 NM
10000
053°
(10)
CLRIC
FL230 280K
17000
10000
006°
(42)
TORRR
FL210 280K
10000
053°
(14)
VDUUB
236°
10 NM
10000
056°
(27)
JOEBU
10000
049°
(16)
SWAYD
226°
10 NM
10000
046°
(47)
DERBN
10000
047°
(16)
WWODD
N
D-ATIS
133.675
DETROIT APP CON
124.975 284.0
NOTE: RADAR required.
NOTE: RNAV 1.
NOTE: DME/DME/IRU or GPS required.
NOTE: Expect Rwy 4L.
NOTE: For use when DTW landing north.
When DTW is landing south or west,
file and expect the HANBL RNAV STAR.
NOTE: TORRR Transition for use by CVG/DAY/
SDF/LEX terminal area departures at or
below FL210 only and ATC use as assigned.
NOTE: Chart not to scale.
ARRIVAL ROUTE DESCRIPTION
SWAYD TRANSITION (SWAYD.LECTR3)
TORRR TRANSITION (TORRR.LECTR3)
WWODD TRANSITION (WWODD.LECTR3)
From HANBL on track 040° to cross LECTR between
8000 and 10000, then on track 074° to cross
FAAVA at 6000, then on track 112° to cross SIZOR
at 6000 and at 210K, then on track 123°.
Expect RADAR vectors to final approach course.
LOST COMMUNICATIONS
From SIZOR, execute RNAV (GPS) Y Rwy 4L or
ILS Y Rwy 4L approach.