

WAAS CH 69508 W27B	APP CRS 273°	Rwy Idg 7500 TDZE 664 Apt Elev 680
--	------------------------	---

RNAV (GPS) RWY 27R

CHICAGO O'HARE INTL (ORD)

RNP APCH.

RADAR required for procedure entry.

T Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations. For uncompensated Baro-VNAV systems, procedure NA below -19°C or above 54°C.

ALSF-2




MISSED APPROACH: Climb to 1100 then climbing right turn to 4000 direct OBK VOR/DME and hold, continue climb-in-hold to 4000.


D-ATIS 135.4 282.225	CHICAGO APP CON 119.0 292.125	O'HARE TOWER 128.15 348.0	GND CON (TWR CENTER) 124.125 (TWR NORTH) 118.05 (TWR SOUTH) 226.675 (ALL TWRs)	121.75 (OBND) 121.9 (IBND)	CLNC DEL 121.6	CPDLC
--	--	-------------------------------------	--	---	--------------------------	-------

MISSED APCH FIX


NORTHBROOK



9 NM

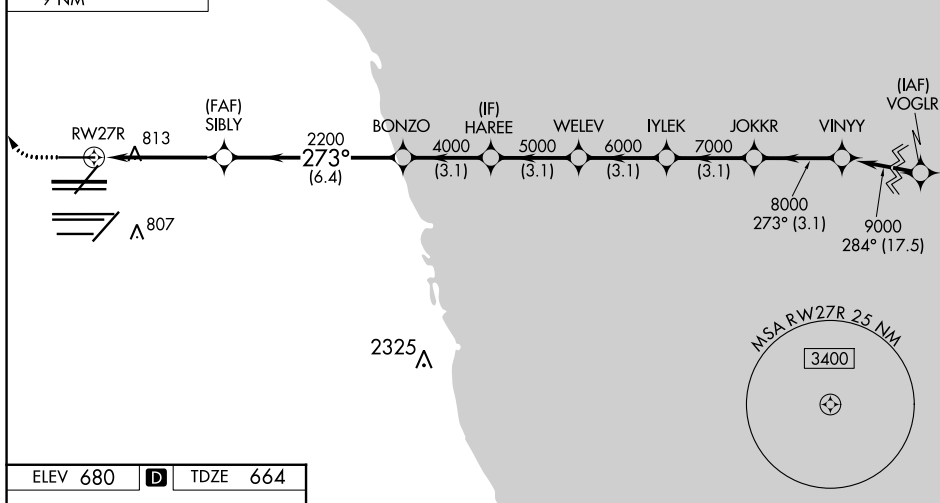

ELEV 680	D	TDZE 664
----------	----------	----------

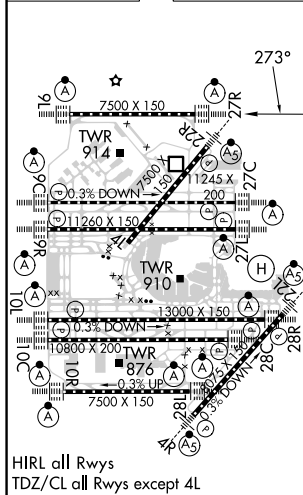

1100 ↑	4000 ↗	OBK 										
* LNAV only.												
CATEGORY LPV DA LNAV/VNAV DA LNAV MDA			A 864/18 961/24 1120/24									
			B 200 (200-½) 297 (300-½) 456 (500-½)									
			C 200 (200-½) 297 (300-½) 456 (500-½)									
			D 200 (200-½) 297 (300-½) 456 (500-½)									