
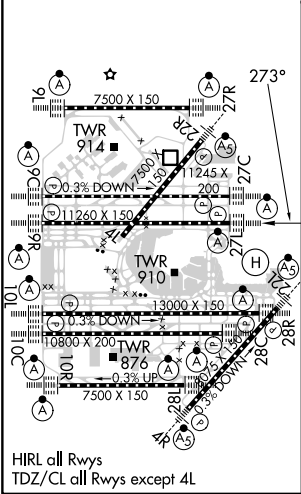


WAAS CH 77804 W27A	APP CRS 273°	Rwy Idg 11260 TDZE 654 Apt Elev 680
--	------------------------	--

RNAV (GPS) Z RWY 27L

CHICAGO O'HARE INTL (ORD)

RNP APCH - GPS.				ALSIF-2	
Simultaneous approach authorized. INAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations. For uncompensated Baro-VNAV systems, INAV/VNAV NA below -19°C or above 54°C.				MISSED APPROACH: Climb to 4000 direct WASCO and hold.	
D-ATIS 135.4 282.225	CHICAGO APP CON 119.0 292.125	O'HARE TOWER 126.9 348.0	GND CON 124.125 (TWR NORTH) 118.05 (TWR SOUTH) 226.675 (ALL TWRs)	(TWR CENTER) 121.75 (OBND) 121.9 (IBND)	CLNC DEL 121.6
			CPDLC		

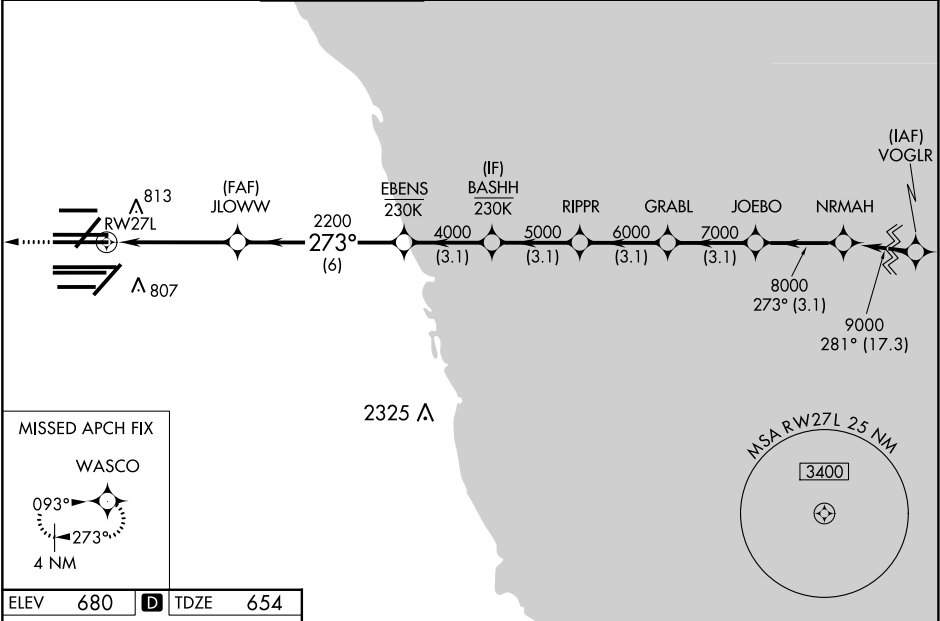

ELEV 680 TDZE 654		4000 WASCO		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 77).		NRMAH	
						JOEBO	
						GRABL	
						RIPPR	
						BASHH	
						EBENS	
						JLOWW	
						2200	
						1.2 NM to RW27L	
						2200	
						4000	
						5000	
						6000	
						7000	
						8000	
						9000	
						GP 3.00° TCH 57	
CATEGORY		A		B		C	
LPV		DA		854/18		200 (200-½)	
LNAV/VNAV		DA		1088/40		434 (500-¾)	
LNAV MDA		1100/24		446 (500-½)		1100/45 446 (500-¾)	