

LOC I-FNF 110.1	APP CRS 219°	Rwy Idg TDZE Apt Elev	8001 31 33
---------------------------	------------------------	-----------------------------	---------------------------------------

ILS Z or LOC Z RWY 22
ELLINGTON (EFD)


	RADAR required for procedure entry.
--	-------------------------------------

T Circling NA west of Rwy 17R-35L. DME from EFD TACAN.
A Simultaneous reception of I-FNF and EFD DME required.
 For inop ALS, increase S-ILS 22 Cat E visibility to RVR
 4000 and S-LOC 22 Cat E visibility to 1½ SM.



MISSED APPROACH: Climb to 700 then climbing left turn to 3100 on VUH VOR/DME R-320 to WATFO INT/VUH 9.3 DME and hold. (TACAN aircraft climb to 700 then climbing left turn to 3100 on EFD TACAN R-136 to WATFO/EFD 16 DME and hold southeast. left turn. 316° inbound.)

ATIS 135.575 269.9	HOUSTON APP CON 134.45 284.0	ELLINGTON TOWER 126.05 253.5	GND CON 121.6 275.8
---	---	---	--

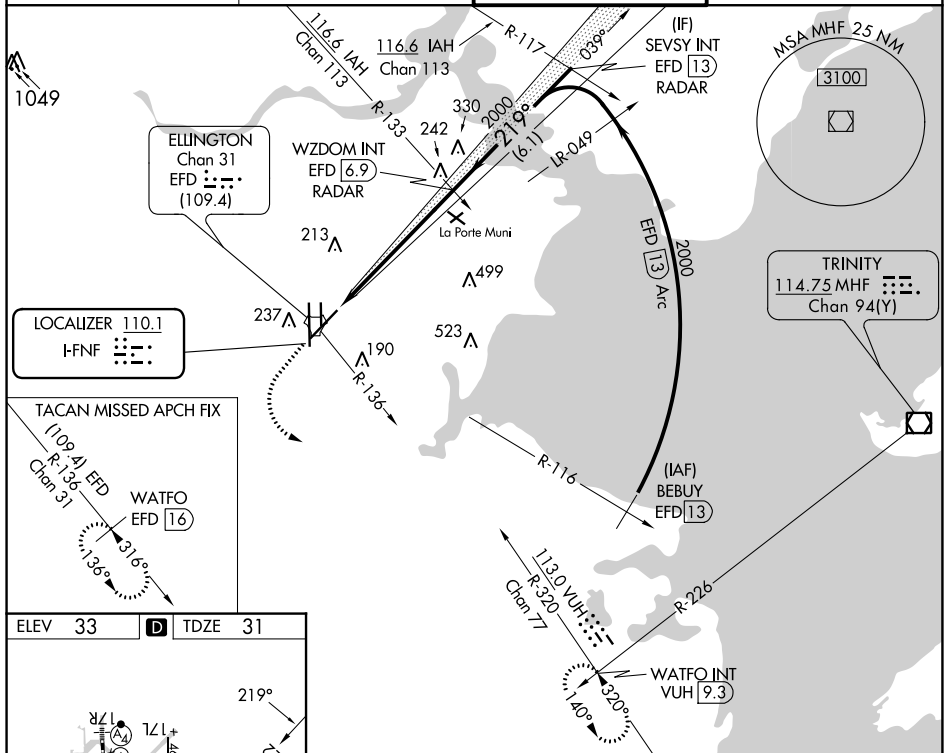

HIRL Rwy's 4-22 and 17R-35L
TDZ/CL Rwy's 17R, 22 and 35L

	FAF to MAP 6 NM				
Knots	60	90	120	150	180
Min:Sec	6:00	4:00	3:00	2:24	2:00

CATEGORY	A	B	C	D	E
S-ILS 22	231/18 200 (200-½)				
S-LOC 22	560/24	529 (600-½)	560/55 529 (600-1)		
CIRCLING	560-1	527 (600-1)	580-1½ 547 (600-1½)	640-2 607 (700-2)	700-2¼ 667 (700-2¼)