

LOC I-OCZ	APP CRS	Rwy Idg
111.1	177°	12901
	TDZE	1195
	Apt Elev	1219

ILS Y or LOC Y RWY 18

LINCOLN (LNK)



When local altimeter setting not available, use Beatrice altimeter setting and increase all DA to 1486 feet and all MDA 100 feet, increase S-LOC Cat C, D and E visibility ¼ SM, Circling Cat C and D visibility ½ SM; increase ROROC fix minimums S-LOC 18 Cat C/D/E visibility to 1½ SM, Circling Cat C visibility to 1¾ SM and Cat D visibility to 2½ SM. For inop ALS, increase S-ILS 18 Cat E visibility to RVR 4000, S-LOC 18 Cat E visibility to 1¾ SM, and ROROC fix minimums S-LOC 18 Cat E visibility to 1½ SM. For inop ALS when using Beatrice altimeter setting, increase S-ILS 18 all Cats visibility to RVR 4500, S-LOC 18 Cat E visibility to 2 SM, and ROROC fix minimums S-LOC 18 Cat C/D/E visibility to 1¾ SM.

#RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH:
Climb to 1700 then
climbing right turn to
3000 direct LNK
VORTAC and hold.

ATIS	OMAHA APP CON	LINCOLN TOWER★	GND CON	CLNC DEL	UNICOM
118.05 290.9	124.0 270.3	118.5(CTAF) 253.5	121.9 275.8	120.7 225.4	122.95

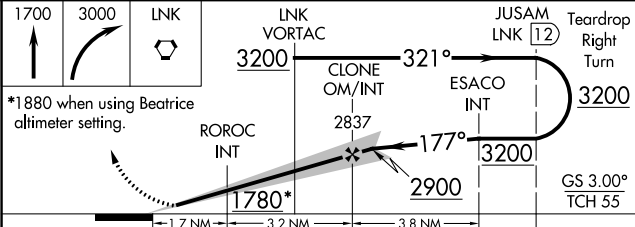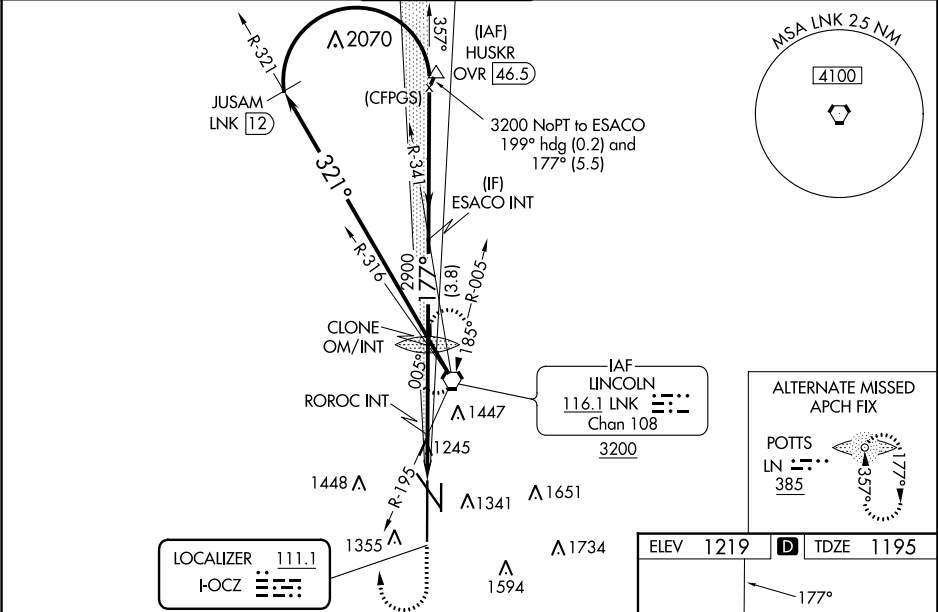

CATEGORY	A	B	C	D	E
S-ILS 18#	1395/24 200 (200-½)				
S-LOC 18	1780/24	585 (600-½)	1780-1¼ 585 (600-1¼)		
CIRCLING	1780-1	561 (600-1)	1780-1¾ 561 (600-1¾)	1820-2 601 (700-2)	2040-3 821 (900-3)
ROROC FIX MINIMUMS (DUAL VOR RECEIVERS REQUIRED)					
S-LOC 18	1720-24	525 (600-½)	1720/55 525 (600-1)		
CIRCLING	1720-1 501 (600-1)	1760-1 541 (600-1)	1760-1½ 541 (600-1½)	1820-2 601 (700-2)	2040-3 821 (900-3)

