

LOC I-LNK <u>109.9</u>	APP CRS 357°	Rwy Idg 12901 TDZE 1175 Apt Elev 1219
----------------------------------	------------------------	--

ILS Y or LOC Y RWY 36
LINCOLN (LNK)

DME required. ADF required for LOC only. RADAR required for procedure entry at THEWS.

MALSR



MISSED APPROACH: Climb to 1700 then climbing right turn to 3000 direct LNK VORTAC and hold.

T For inop ALS, increase S-ILS 36 Cat E visibility to RVR 4000,
A S-LOC 36 Cat E visibility to 1 3/8 SM.


*RVR 1800 authorized with use of FD or AP or HUD to DA.

*RVR 1800 authorized with use of FD or AP or HUD to DA.

ATIS 118.05 290.9	OMAHA APP CON 124.0 270.3	LINCOLN TOWER ★ 118.5 (CTAF) 253.5	GND CON 121.9 275.8	CLNC DEL 120.7 225.4	UNICOM 122.95
----------------------	------------------------------	---------------------------------------	------------------------	-------------------------	------------------

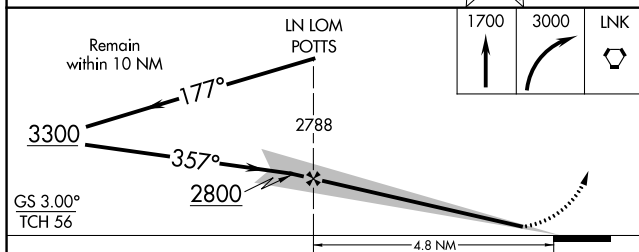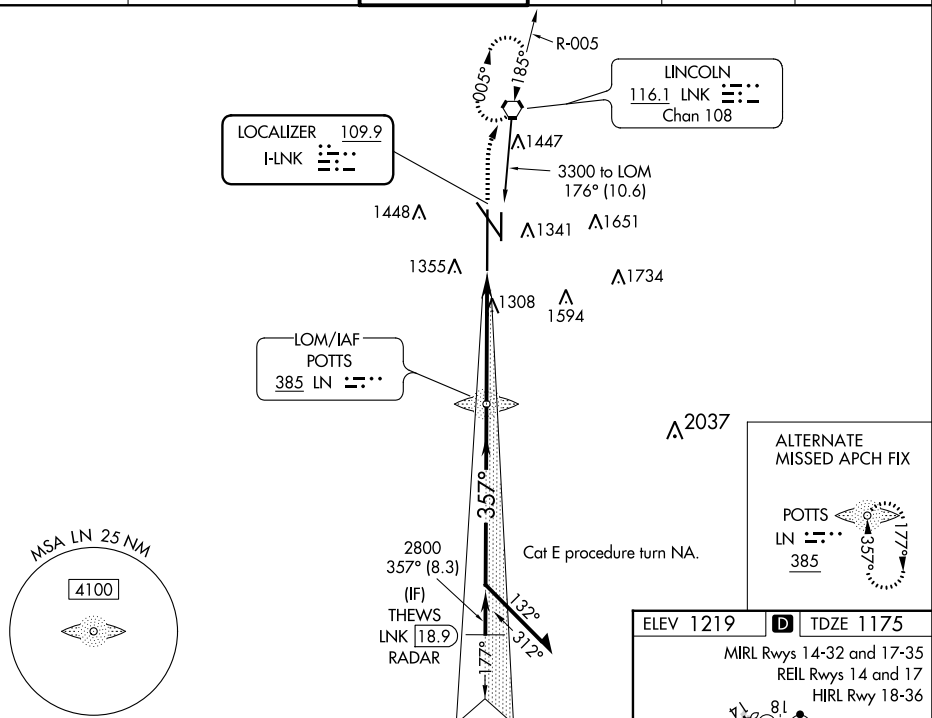

CATEGORY	A	B	C	D	E
S-ILS 36*	1375/24 200 (200-½)				
S-LOC 36	1680/24 505 (500-½)		1680/55 505 (500-1)		
CIRCLING	1680-1 461 (500-1)	1760-1 541 (600-1)	1760-1½ 541 (600-1½)	1820-2 601 (700-2)	2040-3 821 (900-3)

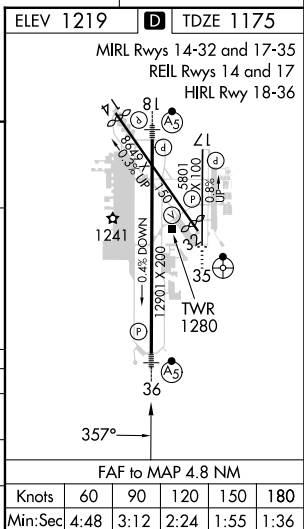

ILS Y or LOC Y RWY 36 LINCOLN (LNK)