

WAAS CH 40137 W17A	APP CRS 177°	Rwy Idg 5400 TDZE 1219 Apt Elev 1219
--	------------------------	---

RNAV (GPS) RWY 17

LINCOLN (LNK)


⚠

Baro-VNAV NA when using Beatrice altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C (-7°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Beatrice altimeter setting and increase all DA 91 feet, and all MDA 100 feet, increase LPV and LNAV/VNAV all Cats visibility ¼ mile, increase LNAV Cats C/D and Circling Cats C/D visibility ¼ mile.


MISSED APPROACH:

Climb to 3300 direct HIVUV and hold.

ATIS 118.05 290.9	OMAHA APP CON 124.0 270.3	LINCOLN TOWER* 118.5(CTAF) 253.5	GND CON 121.9 275.8	CLNC DEL 120.7 225.4	UNICOM 122.95
-----------------------------	-------------------------------------	--	-------------------------------	--------------------------------	-------------------------

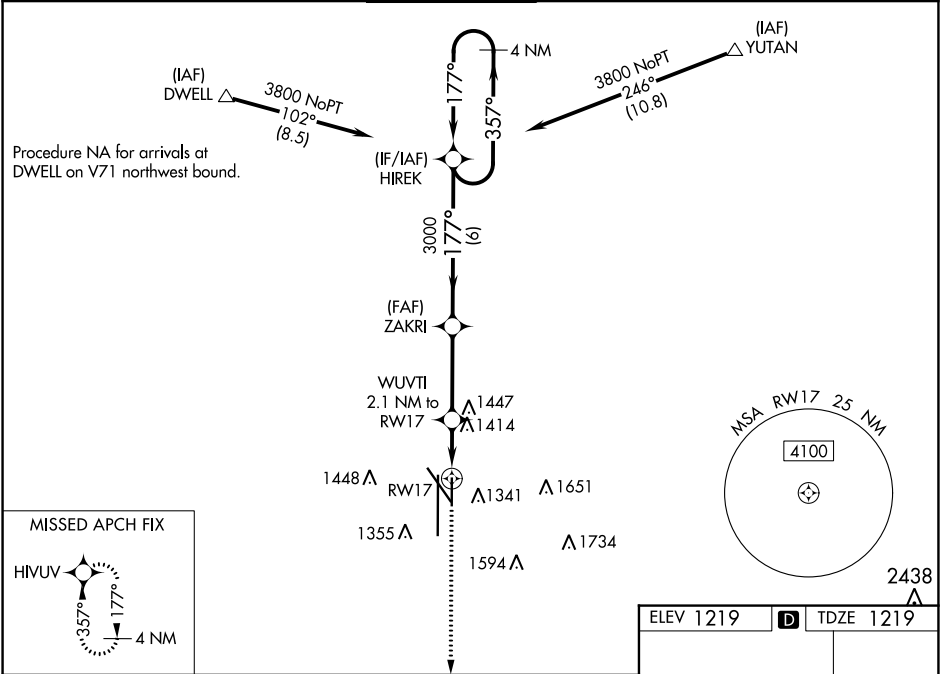

3300	HIVUV	WUVTI 2.1 NM to RW17	ZAKRI 3000	HIREK 4 NM Holding Pattern	357° → 3800 ← 177°
* LNAV only.					
* 1.3 NM to RW17					
RW17					
1.3 NM 0.8 NM 3.4 NM 6 NM					
GP 3.00° TCH 44					
CATEGORY	A	B	C	D	
LPV DA	1419-¾ 200 (200-¾)				
LNAV/VNAV DA	1615-1⅜ 396 (400-1⅜)				
LNAV MDA	1680-1 461 (500-1)		1680-1⅜ 461 (500-1⅜)		
CIRCLING	1680-1 461 (500-1)	1760-1 541 (600-1)	1820-1¾ 601 (700-1¾)	1960-2½ 741 (800-2½)	

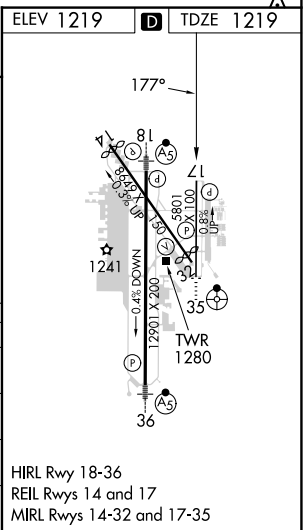

NC-2, 30 NOV 2023 to 28 DEC 2023

NC-2, 30 NOV 2023 to 28 DEC 2023