

WAAS CH 70611 W04B	APP CRS 046°	Rwy Idg 7200 TDZE 260 Apt Elev 266
--	------------------------	---

RNAV (GPS) RWY 4R

BILL AND HILLARY CLINTON NTL/ADAMS FLD (LIT)

RNP APCH-GPS.

▼ Rwy 4R helicopter visibility reduction below RVR 4000 NA. For uncompensated Baro-VNAV systems, INAV/VNAV NA below -15°C or above 54°C.


▲ Simultaneous approach authorized. INAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations. For inop ALS, increase LPV all Cats visibility to RVR 4500, INAV/VNAV all Cats visibility to 1% SM and INAV Cat A/B visibility to RVR 5500 and Cat C/D to 1% SM.

MALSR




MISSED APPROACH:
Climb to 2900 direct
RIRIW and on track 047°
to BRAUM and hold.

D-ATIS 125.65	LITTLE ROCK APP CON 135.4 353.6	ADAMS TOWER 118.7 257.8	GND CON 121.9 339.8	CLNC DEL 118.95
------------------	------------------------------------	----------------------------	------------------------	--------------------

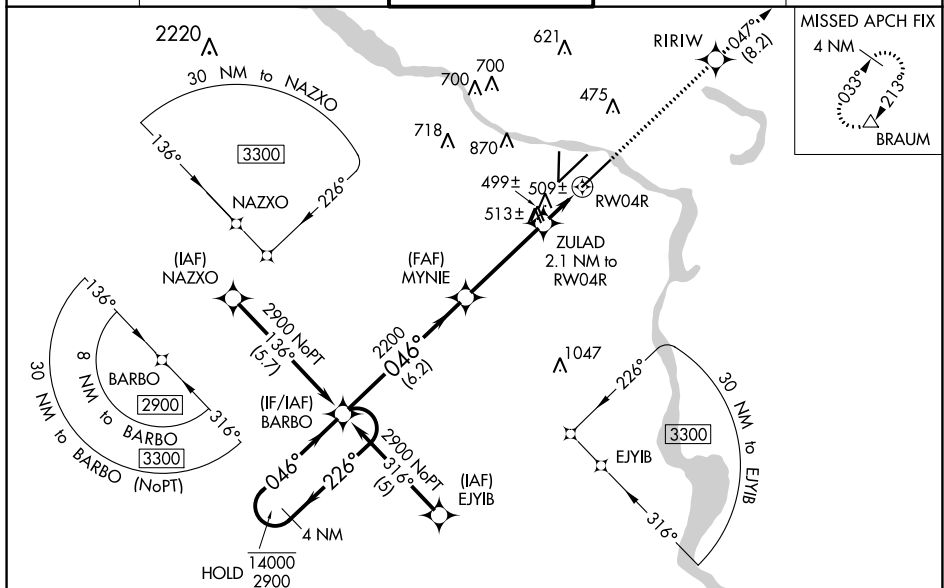

ELEV 266		TDZE 260
----------	---	----------

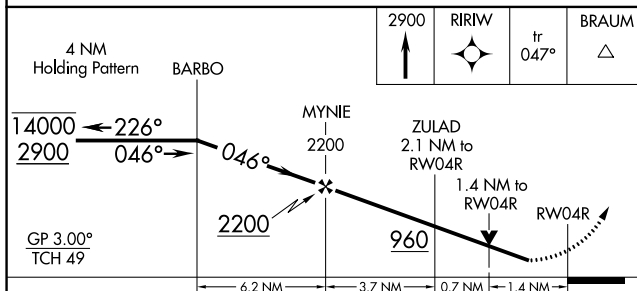

CATEGORY	A	B	C	D
LPV DA	574/40 314 (400-3/4)			
RNAV/ VNAV DA	756/50 496 (500-1)			
RNAV MDA	760/40 500 (500-3/4)		760/50 500 (500-1)	
 CIRCLING	820-1 554 (600-1)	1000-1 734 (800-1)	1180-2 3/4 914 (1000-2 3/4)	1180-3 914 (1000-3)

