

APP CRS	Rwy Idg	11259
071°	TDZE	128
	Apt Elev	128

RNAV (RNP) Z RWY 7L
LOS ANGELES INTL (LAX)


V For uncompensated Baro-VNAV systems, procedure NA below 5°C (41°F) or above 54°C (130°F). GPS required. Simultaneous approach authorized. For inop ALS, increase RNP 0.11 all Cats visibility to RVR 5000 and RNP 0.30 all Cats visibility to RVR 6000.

MALSR



MISSED APPROACH: Climb to 3000 on track 071° to FILBA and on track 072° to DOWNE and hold.

D-ATIS	SOCAL APP CON	LOS ANGELES TOWER	GND CON	CLNC DEL	CPDLC
ARR 133.8	124.3 363.2 (APCH FM WEST)	N 133.9 239.3	N 121.65 327.0	120.35	
DEP 135.65	124.5 235.975 (225°-044°)	S 120.95 379.1	S 121.75 327.0 W 121.4 327.0	327.0	
	128.5 360.7 (045°-089°)				

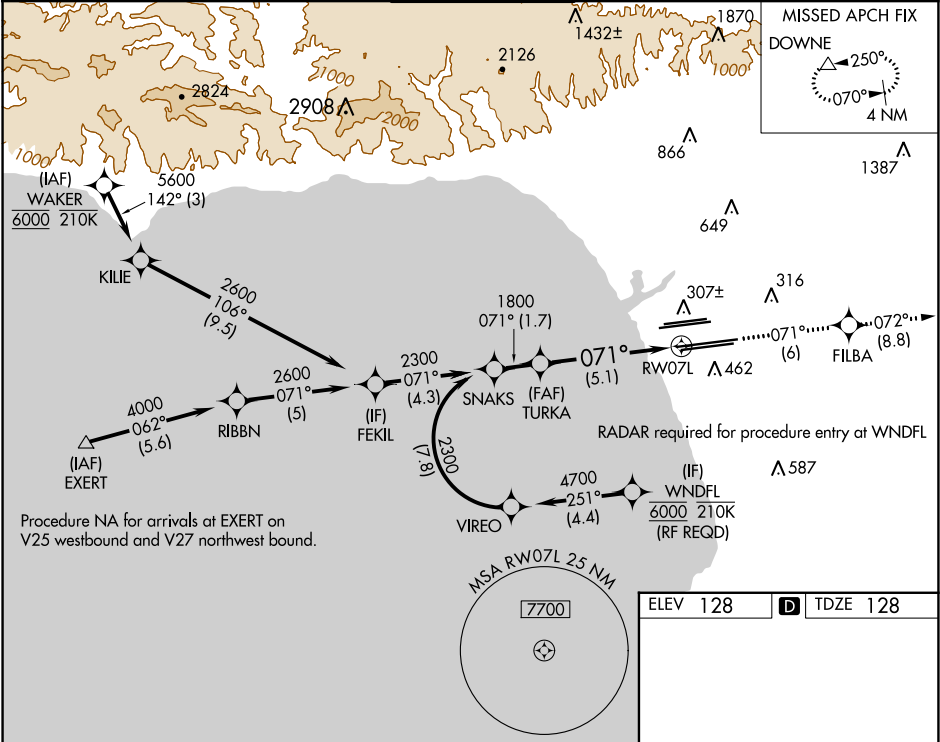

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 83).

GP 3.00° TCH 59


2300 071° 1800 1800 RW07L

1.7 NM 5.1 NM

CATEGORY	A	B	C	D
RNP 0.11 DA		441/24	313 (400-½)	
RNP 0.30 DA		485/40	357 (400-¾)	

AUTHORIZATION REQUIRED

ELEV 128 TDZE 128



TDZ/CL Rwy 6R, 7L, 24R, and 25L
HIRL all Rwy

SW-3, 30 NOV 2023 to 28 DEC 2023

SW-3, 30 NOV 2023 to 28 DEC 2023