


RNAV 1 - GPS.
RADAR required.

TOP ALTITUDE:
14000

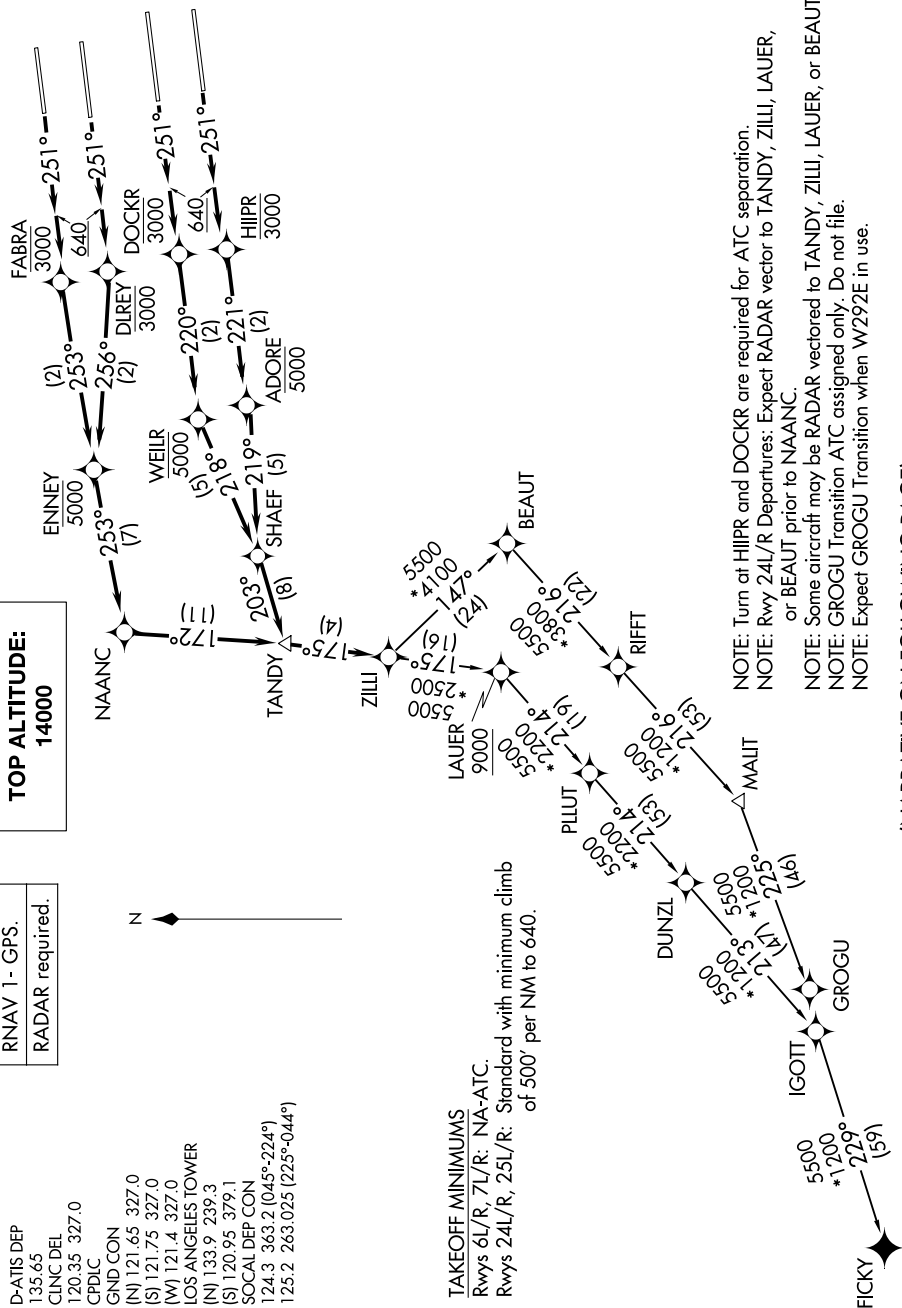

NOTE: Turn at HILPR and DOCKR are required for ATC separation.

NOTE: Rwy 24L/R Departures: Expect RADAR vector to TANDY, ZILLI, LAUER, or BEAUT prior to NAANC.

NOTE: Some aircraft may be RADAR vectored to TANDY, ZILLI, LAUER, or BEAUT.

NOTE: GROGU Transition ATC assigned only. Do not file.

NOTE: Expect GROGU Transition when W292E in use.

(NARRATIVE ON FOLLOWING PAGE)

ZILLI FIVE DEPARTURE (RNAV)

(ZILLI5.ZILLI) 23FEB23

LOS ANGELES, CALIFORNIA
LOS ANGELES INTL (LAX)