
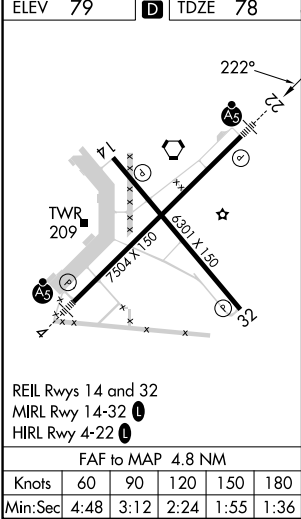


LOC I-MZR 109.5	APP CRS 222°	Rwy Idg TDZE 78 Apt Elev 79
---------------------------	------------------------	---

ILS or LOC RWY 22
MONROE RGNL (MLU)

DME or RADAR required for procedure entry.	MALSR 	MISSED APPROACH: Climb to 1800 then climbing right turn to 3000 direct MLU VORTAC and hold, continue climb-in-hold to 3000.
Circling Rwy 14 NA at night. For inop ALS, increase S-LOC 22 Cat C/D visibility to 1½ SM. # DME from MLU VORTAC.		

ATIS 125.05	MONROE APP CON ★ 118.15 290.475	MONROE TOWER ★ 118.9 (CTAF) 257.8	GND CON 121.9	CLNC DEL 121.65	UNICOM 122.95
-----------------------	---	---	-------------------------	---------------------------	-------------------------

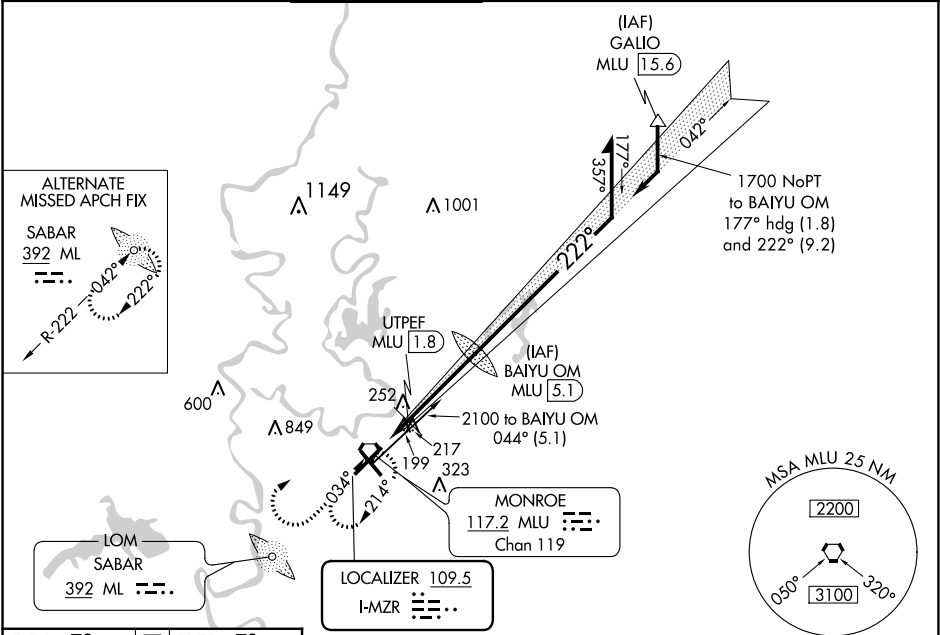

1800	3000	MLU	GVSI and ILS glidepath not coincident (GVSI Angle 3.00/TCH 50).	
*LOC only.				
CATEGORY	A	B	C	D
S-ILS 22	278-½ 200 (200-½)			
S-LOC 22	560-½ 482 (500-½)	560-1 482 (500-1)		
CIRCLING	580-1 501 (600-1)	740-¾ 661 (700-¾)	1160-3 1081 (1100-3)	
# UTPEF FIX MINIMUMS				
S-LOC 22	500-½ 422 (500-½)	500-¾ 422 (500-¾)		
CIRCLING	580-1 501 (600-1)	740-¾ 661 (700-¾)	1160-3 1081 (1100-3)	