
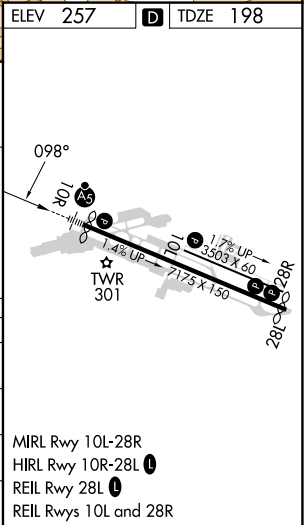
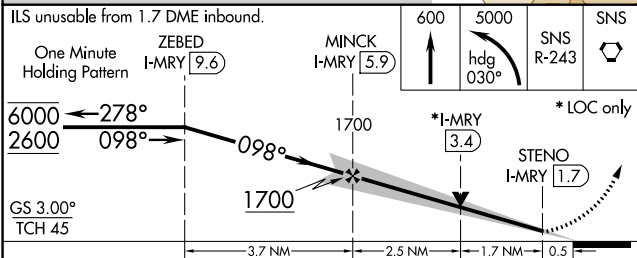


|                                                 |                        |                                                   |
|-------------------------------------------------|------------------------|---------------------------------------------------|
| LOC/DME I-MRY<br><b>110.7</b><br>Chan <b>44</b> | APP CRS<br><b>098°</b> | Rwy Idg<br>TDZE <b>198</b><br>Apt Elev <b>257</b> |
|-------------------------------------------------|------------------------|---------------------------------------------------|

ILS or LOC RWY 10R  
MONTEREY RGNL (MRY)

|                                                                                                                                                                         |       |                                                                                                                                                                                                                                    |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| DME required.                                                                                                                                                           | MALSR | MISSED APPROACH: Climb to 600 then climbing left turn to 5000 on heading 030° and on SNS VORTAC R-243 to SNS VORTAC and hold, continue climb-in-hold to 5000. # Missed approach requires minimum climb of 265 feet per NM to 1360. |
| <p>⚠ Circling NA south of Rwy 10R-28L.<br/>For inop ALS, increase S-ILS 10R all Cats visibility to RVR 6000, and increase S-LOC 10R Cat C and D visibility to 2 SM.</p> |       |                                                                                                                                                                                                                                    |

|                       |                                                                                        |                                                      |                                 |                           |                         |
|-----------------------|----------------------------------------------------------------------------------------|------------------------------------------------------|---------------------------------|---------------------------|-------------------------|
| ATIS<br><b>119.25</b> | NORCAL APP CON<br><b>133.0 251.15</b> (001°-135°)<br><b>127.15 307.125</b> (136°-360°) | MONTEREY TOWER ★<br><b>118.4</b> (CTAF) <b>257.8</b> | GND CON<br><b>120.875 348.6</b> | CLNC DEL<br><b>135.45</b> | UNICOM<br><b>122.95</b> |
|-----------------------|----------------------------------------------------------------------------------------|------------------------------------------------------|---------------------------------|---------------------------|-------------------------|

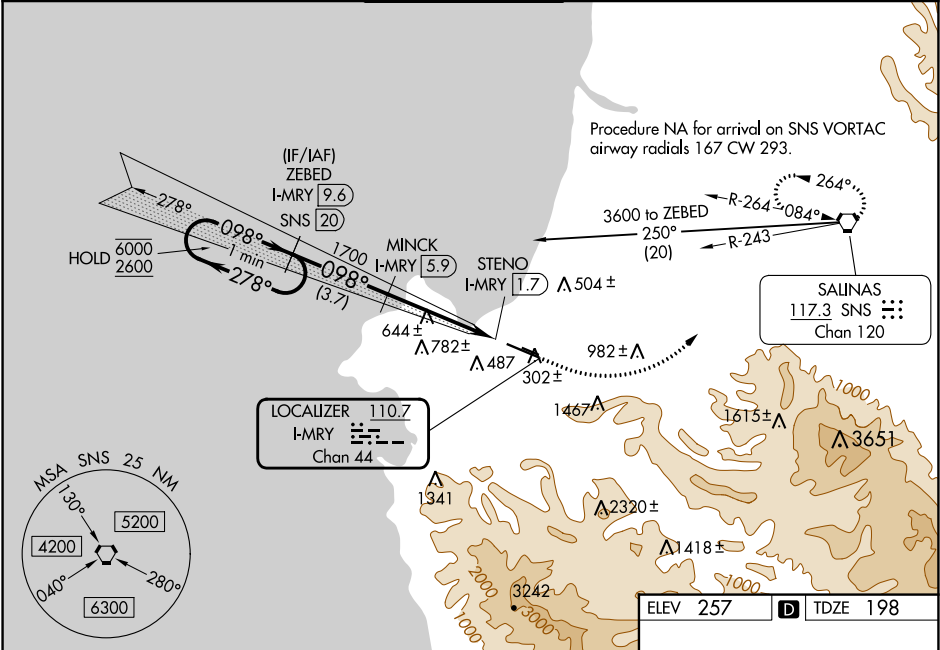

| CATEGORY   | A      | B           | C      | D             |
|------------|--------|-------------|--------|---------------|
| S-ILS 10R# | 398/24 | 200 (200-½) |        |               |
| S-ILS 10R  | 583/35 | 385 (400-¾) |        |               |
| S-LOC 10R  | 920/24 | 722 (700-½) | 920-1½ | 722 (700-1¾)  |
| CIRCLING   | 920-1  | 663 (700-1) | 1280-3 | 1023 (1100-3) |

MIRL Rwy 10L-28R  
HIRL Rwy 10R-28L  
REIL Rwy 28L  
REIL Rwy 10L and 28R