

APP CRS	Rwy Idg	7702
021°	TDZE	599
	Apt Elev	599

RNAV (RNP) Z RWY 2L
NASHVILLE INTL (BNA)

T For uncompensated Baro-VNAV systems, procedure NA below -11°C (13°F) or above 54°C (130°F). GPS required. Simultaneous approach authorized with Rwy 2R. For inop ALSF-2, increase RNP 0.15 all Cats visibility to RVR 4700, increase RNP 0.30 all Cats visibility to 1 1/4 mile. Use of FD or AP providing RNAV track guidance required during simultaneous operations.

ALSF-2



MISSED APPROACH:
Climb to 4000 on track
021° to HIKRY and hold,
continue climb-in-hold
to 4000.

D-ATIS
135.1


NASHVILLE APP CON
118.4 360.7

NASHVILLE TOWER
118.6 257.8

GND CON
121.9 348.6

CLNC DEL
126.05

CPDLC

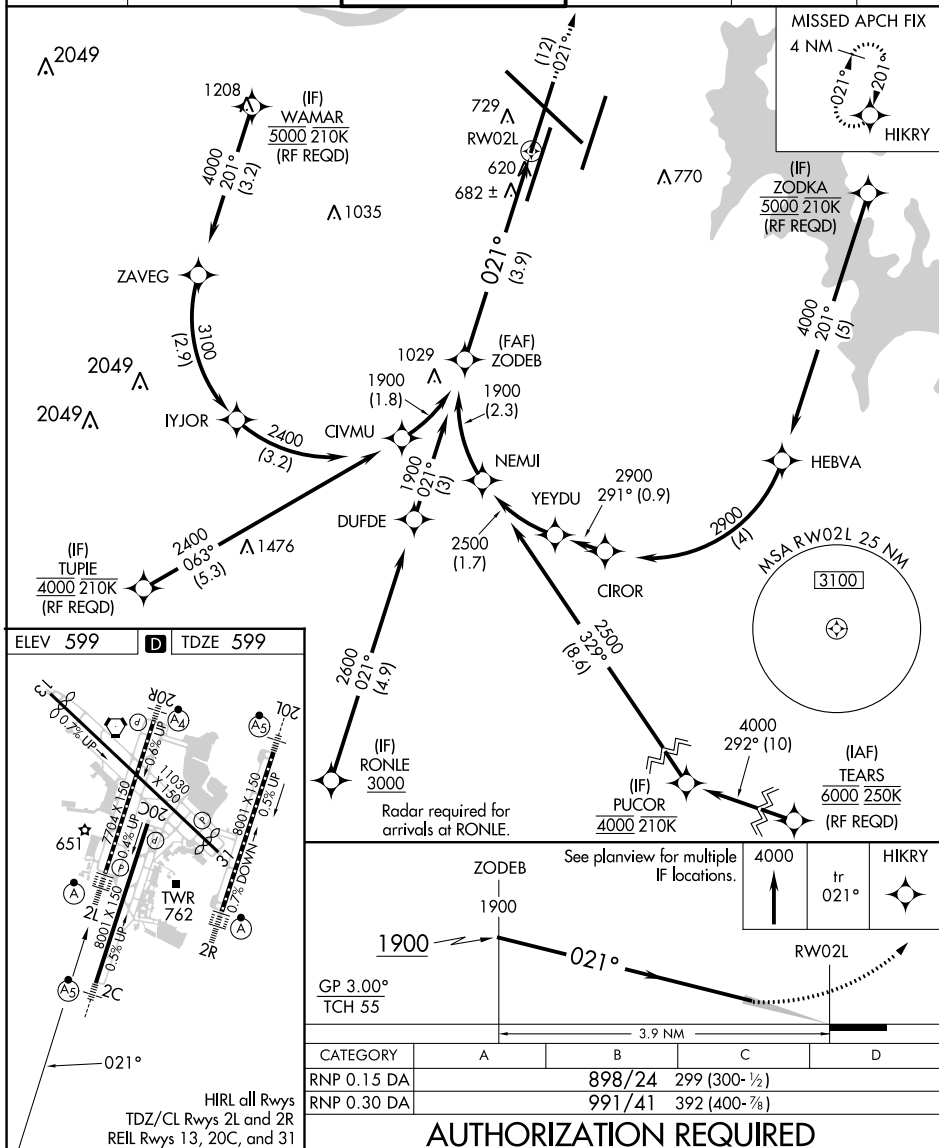

CATEGORY	A	B	C	D
RNP 0.15 DA		898/24	299 (300-½)	
RNP 0.30 DA		991/41	392 (400-⅞)	

AUTHORIZATION REQUIRED