


WAAS CH 70613 W02B	APP CRS 021°	Rwy Idg TDZE Apt Elev	7601 587 599
--	------------------------	-----------------------------	---

RNAV (GPS) Y RWY 2C

NASHVILLE INTL (BNA)

RNP APCH - GPS.			MALSR 		MISSED APPROACH: Climb to 4000 direct GUYEK and on track 019° to HIKRY and hold, continue climb-in-hold to 4000.	
▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -11°C or above 54°C. Use of FD or AP providing RNAV track guidance required during simultaneous operations. LNAV procedure NA during simultaneous operations. Simultaneous approach authorized with Rwy 2R. ** RVR 1800 authorized with use of FD or AP or HUD to DA.						
D-ATIS 135.1	NASHVILLE APP CON 118.4 360.7	NASHVILLE TOWER 118.6 257.8	GND CON 121.9 348.6		CLNC DEL 126.05	CPDLC

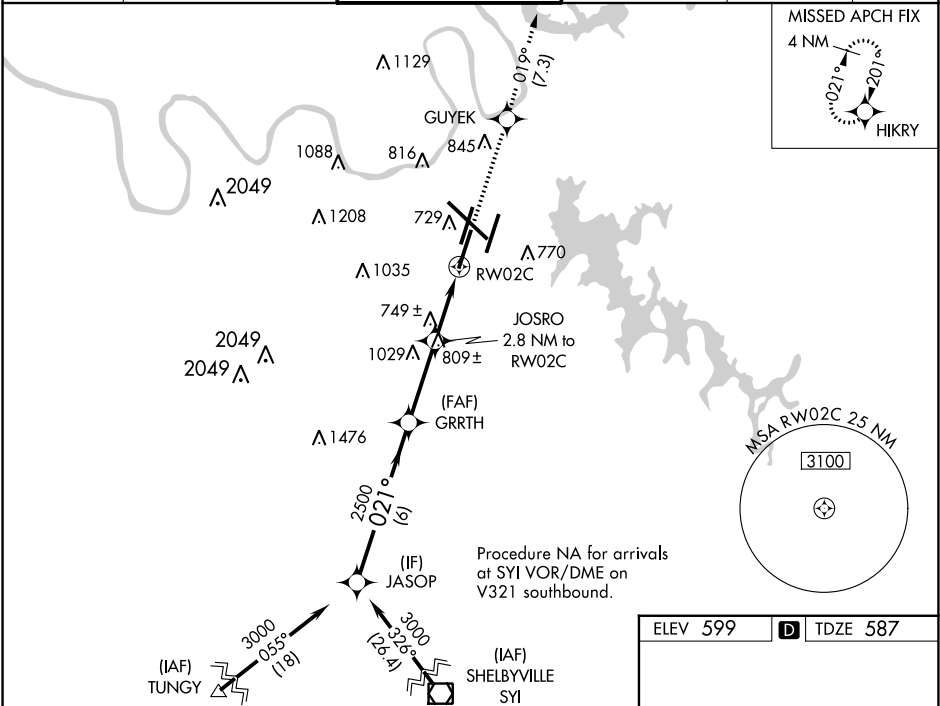

VGSI and RNAV glidepath not coincident.		4000	GUYEK	tr 019°	HIKRY
JASOP		GRRTH	JOSRO	*LNAV only	
3000		2500	2.8 NM to RW02C	*1.2 NM to RW02C	
GP 3.00° TCH 60		*1520	1.6 NM	1.2 NM	
6 NM		3.1 NM	1.6 NM	1.2 NM	
CATEGORY	A	B	C	D	
LPV DA**	787/24 200 (200-½)				
LNAV/VNAV DA	1059/60 472 (500-1¼)				
LNAV MDA	1000/24	413 (500-½)	1000/40	413 (500-¾)	
CIRCLING	1100-1 501 (600-1)	1120-1 521 (600-1)	1200-1¾ 601 (700-1¾)	1380-2½ 781 (800-2½)	