

APP CRS	Rwy Idg	6502
288°	TDZE	10
	Apt Elev	18

RNAV (RNP) Y RWY 29

NEWARK LIBERTY INTL (EWR)


RNP AR APCH. RF required.

T Straight-in Rwy 29 at night, operational VGSI required, remain on or above VGSI glidepath until threshold. For uncompensated Baro-VNAV systems, **NA** procedure NA below -12°C or above 54°C.

****Missed approach requires a minimum climb of 417 feet per NM to 800.**

MISSED APPROACH: Climb to 2000 on track 288° to MUFIE and hold.

D-ATIS	NEW YORK APP CON	NEWARK TOWER	GND CON	CLNC DEL	CPDLC
115.7 134.825	128.55 379.9	118.3 257.6	121.8	118.85	

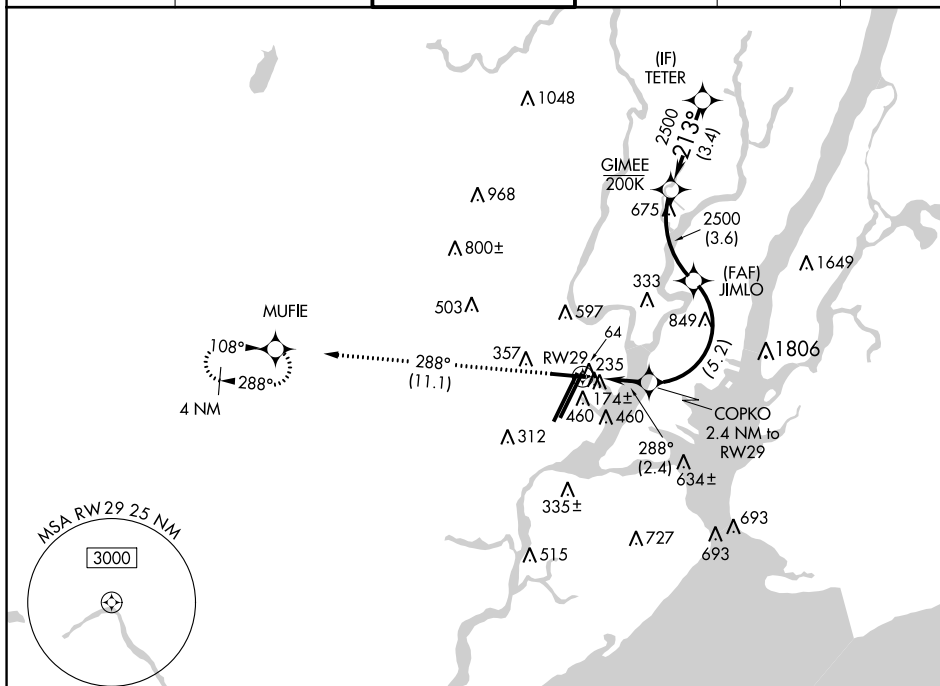

ELEV	18	D	TDZE	10
------	----	----------	------	----

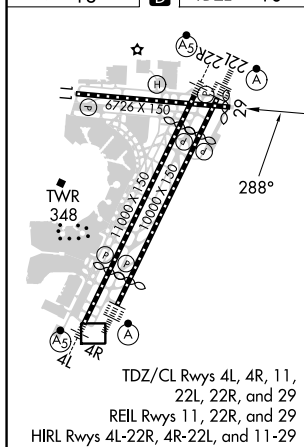


Diagram illustrating the profile view of the road section from station 0+00 to station 3+00. Key features include:

- Stationing:** 0+00, 0+24, 0+52, 1+52, 3+00.
- Elevations:** 288°, 834, 2500, 3000.
- Horizontal Distances:** 2.4 NM, 5.2 NM, 3.6 NM, 3.4 NM.
- Points:** RW29, COPKO, JIMLO, GIMEE, TETER.
- Notes:** GP 3.00° TCH 60.

AUTHORIZATION REQUIRED