
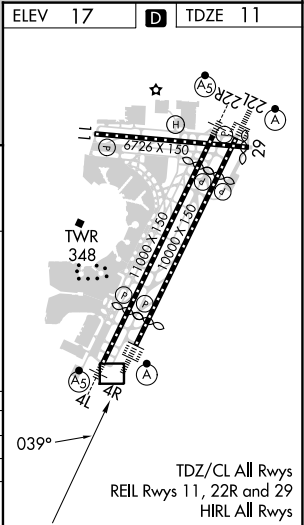
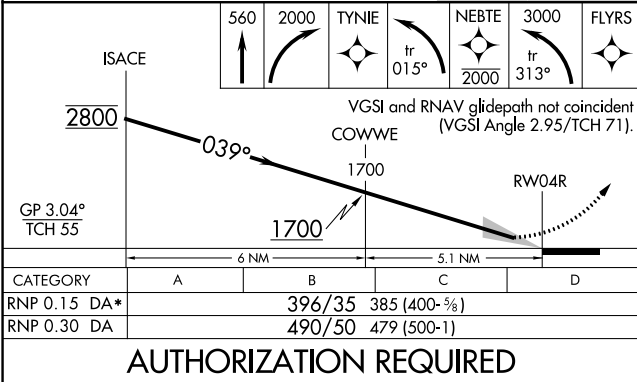


APP CRS	Rwy Idg	8810
039°	TDZE	11
	Apt Elev	17

RNAV (RNP) Z RWY 4R

NEWARK LIBERTY INTL (EWR)

RNP AR APCH.		ALSf-2 	MISSED APPROACH: (Do not exceed 210K until NEBTE) Climb to 560 then climbing right turn to 2000 direct TYNIE and left turn on track 015° to NEBTE, cross NEBTE at or below 2000 then climbing left turn to 3000 on track 313° to FLYRS and hold, continue climb-in-hold to 3000. * Missed approach requires minimum climb of 351 feet per NM to 660.					
RADAR required.								
▼ For uncompensated Baro-VNAV systems, procedure ▲ NA below -12°C or above 54°C. For inop ALS, increase RNP 0.30 all Cats visibility to 1½ SM.								
D-ATIS		NEW YORK APP CON		NEWARK TOWER		GND CON	CLNC DEL	CPDLC
115.7 134.825		128.55 379.9		118.3 257.6		121.8	118.85	

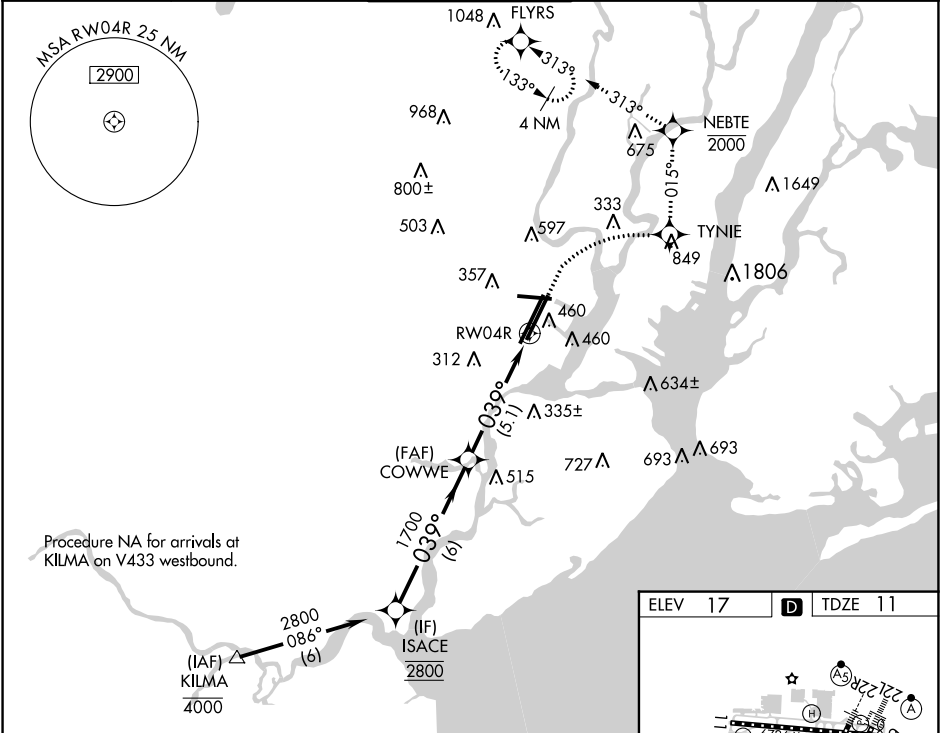

RNAV (RNP) Z RWY 4R

NE-2, 30 NOV 2023 to 28 DEC 2023

NE-2, 30 NOV 2023 to 28 DEC 2023