


APP CRS	Rwy Idg	8505
217°	TDZE	770
	Apt Elev	809

RNAV (RNP) Z RWY 22
SAN ANTONIO INTL (SAT)


T For uncompensated Baro-VNAV systems, procedure NA below -2°C (29°F) or above 54°C (130°F). GPS required.	MISSED APPROACH: Climb to 3100 on track 217° to IMIKE and track 137° to EMBOW and hold.
--	---

D-ATIS 118.9	SAN ANTONIO APP CON 125.1 307.0	SAN ANTONIO TOWER 119.8 257.8	GND CON 121.9 348.6	CLNC DEL 126.7	CPDLC
------------------------	---	---	-------------------------------	--------------------------	-------

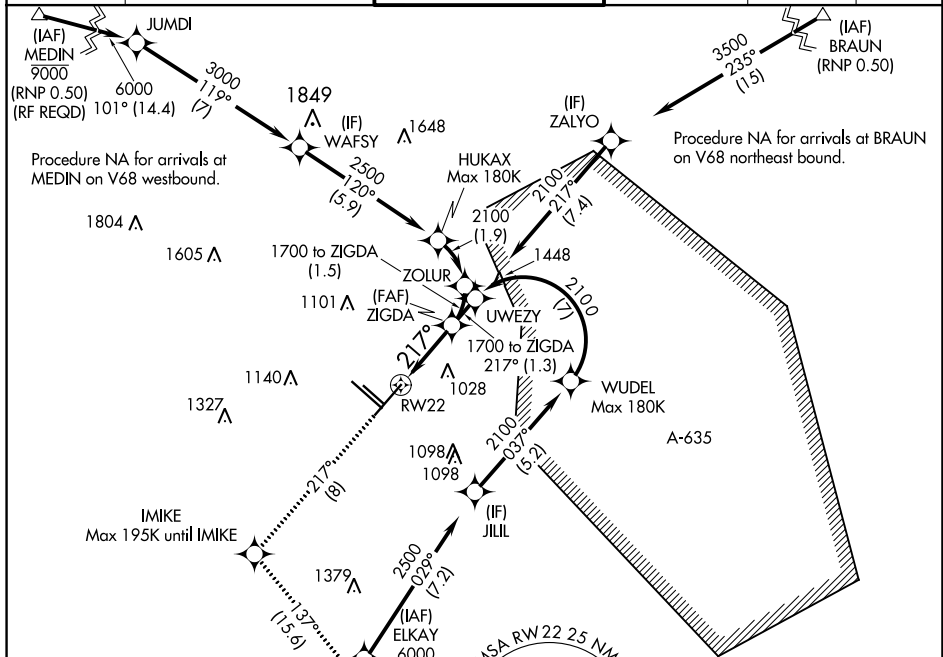

3100 ↑ tr 217°	IMIKE ✦	tr 137°	EMBOW △	VGSJ and RNAV glidepath not coincident (VGSJ Angle 3.00/TCH 85). ZIGDA
----------------------	------------	---------	------------	--

See planview for multiple IF locations.

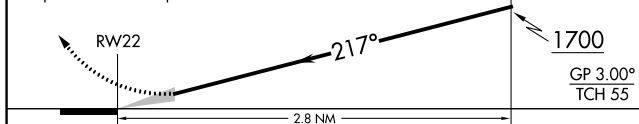

CATEGORY	A	B	C	D
RNP 0.15 DA		1120-1 $\frac{1}{8}$	350 (400-1 $\frac{1}{8}$)	
RNP 0.30 DA		1320-1 $\frac{7}{8}$	550 (600-1 $\frac{7}{8}$)	

AUTHORIZATION REQUIRED

