


APP CRS	Rwy Idg	7591
275°	TDZE	17
	Apt Elev	17

RNAV (RNP) Z RWY 27
SAN DIEGO INTL (SAN)

RNP AR APCH. ▼ For uncompensated Baro-VNAV systems, procedure NA below 6°C or above 46°C. Straight-in Rwy 27 at night, operational VGSI required, remain on or above VGSI glidepath until threshold. For inop ALS, increase RNP 0.30 all Cats visibility to 2½ SM.	MALS (A4)	MISSED APPROACH: Climb to 2500 on track 275° to SARGS and hold.
---	--------------	---

D-ATIS 134.8	SOCAL APP CON 119.6 363.1 (WEST) 124.35 279.625 (EAST)	LINDBERGH TOWER 118.3 338.225	GND CON 123.9	CLNC DEL 125.9	CPDLC
-----------------	--	----------------------------------	------------------	-------------------	-------

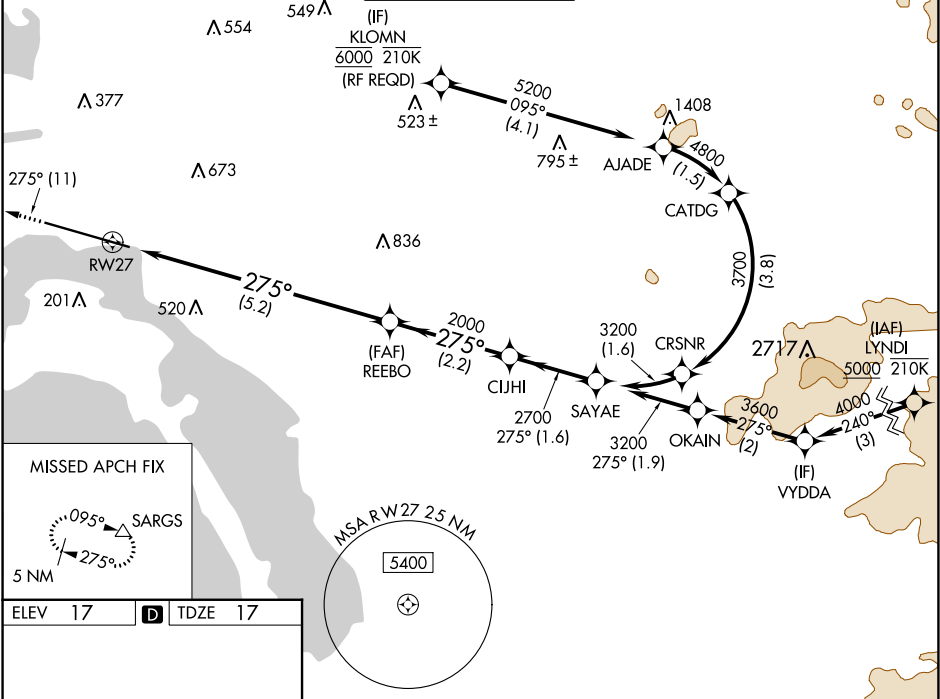

ELEV 17

D

TDZE 17

TWR 159

9401 X 200

70

275°

TDZ/CL Rws 9 and 27
HIRL Rwy 9-27

2500

SARGS

See planview for multiple IF locations.

RW27

REEBO

CUJHI

SAYAE

2000

2700

3200

GP 3.50°

TCH 65

CATEGORY	A	B	C	D
RNP 0.11 DA	617-1½ 600 (600-1½)			
RNP 0.30 DA	778-2 761 (800-2)			

AUTHORIZATION REQUIRED

SW-3, 30 NOV 2023 to 28 DEC 2023

SW-3, 30 NOV 2023 to 28 DEC 2023