


WAAS	APP CRS	Rwy Idg	8412
CH 50108	274°	TDZE	774
W27A		Apt Elev	798


RNAV (GPS) RWY 27L

SOUTH BEND INTL (SBN)

RNP APCH - GPS		MALSR	MISSED APPROACH: Climb to 2600 direct TOKOC and hold.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. For inop ALS, increase LNAV Cat C/D visibility to 1½ SM. Circling Rwy 27R NA at night.			
ATIS	SOUTH BEND APP CON★	SOUTH BEND TOWER★	GND CON
120.675	118.55 257.8	135.675 (CTAF) 0 257.8	121.7
			CLNC DEL
			121.9

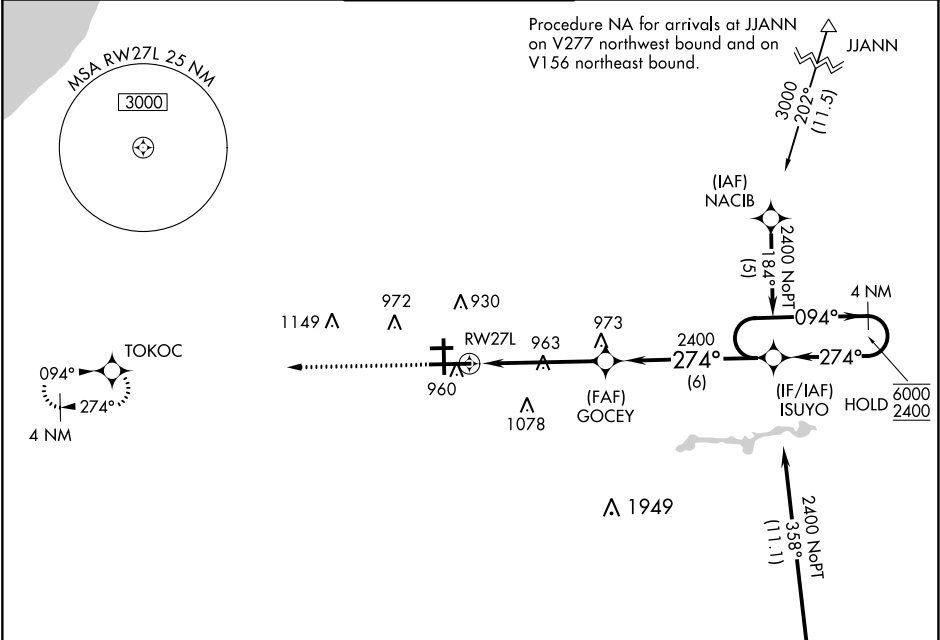

ELEV 798	D	TDZE 774
----------	---	----------

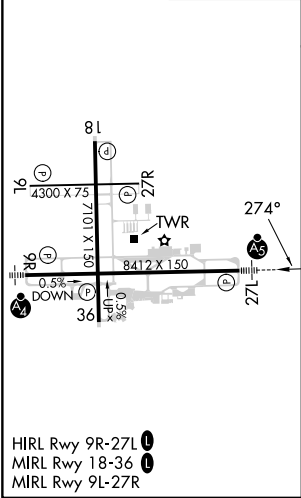

2600 TOKOC		GOCEY		ISUYO		4 NM Holding Pattern
		2400				
1.4 NM to RW27L		274°		094°		6000 2400
RW27L		2400		274°		
1.4 NM		3.5 NM		6 NM		GP 3.00° TCH 53
CATEGORY	A	B	C	D		
LPV DA	1030/24		256 (300-½)			
LNAV/VNAV DA	1160/40		386 (400-¾)			
LNAV MDA	1260/24	486 (500-½)	1260/50	486 (500-1)		
CIRCLING	1280-1	482 (500-1)	1440-1¾ 642 (700-1¾)	1500-2¼ 702 (800-2¼)		