


LOC/DME I-SYR 109.9 Chan 36	APP CRS 280°	Rwy Idg TDZE Apt Elev	9014 413 421
---	------------------------	-----------------------------	---


ILS or LOC RWY 28
SYRACUSE HANCOCK INTL (SYR)

DME or RADAR required.		ALS-F-2 	MISSED APPROACH: Climb to 1100 then climbing right turn to 3000 direct SYR VORTAC and hold, continue climb-in-hold to 3000.
------------------------	--	-------------	---

ATIS 124.225	SYRACUSE APP CON 126.125 269.125	SYRACUSE TOWER 120.3 239.0	GND CON 121.7 348.6	CLNC DEL 125.05 257.775
------------------------	--	--------------------------------------	-------------------------------	-----------------------------------

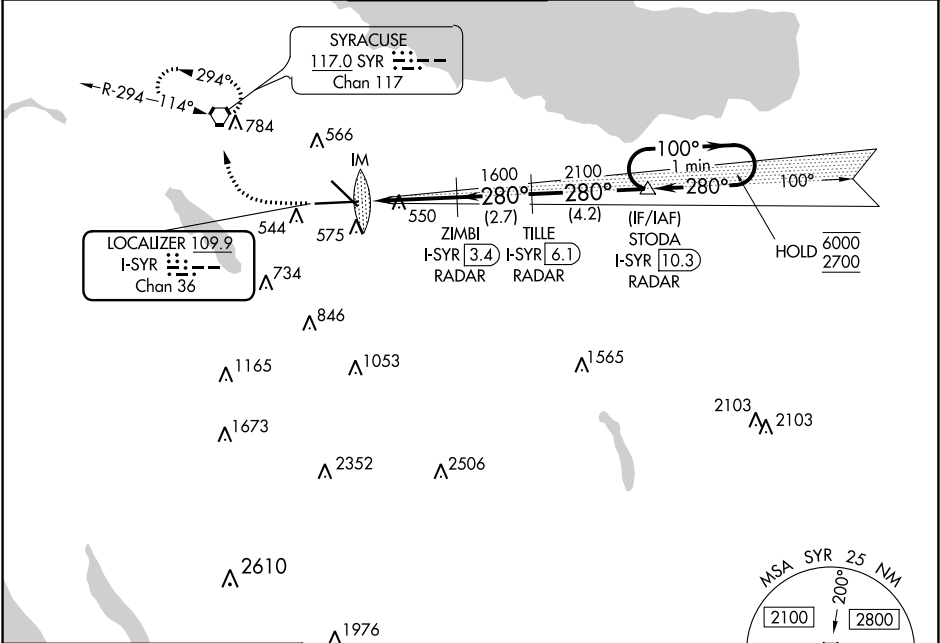

ELEV 421	D	TDZE 413
-----------------	----------	-----------------

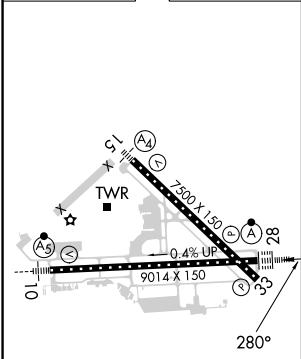

TDZ/CL Rwy 28					
HIRL Rlys 10-28 and 15-33					
FAF to MAP 3.6 NM					
Knots	60	90	120	150	180
Min:Sec	3:36	2:24	1:48	1:26	1:12

1100		3000	SYR	*LOC only	STODA I-SYR 10.3 RADAR	One Minute Holding Pattern
					ZIMBI I-SYR 3.4 RADAR	
I-SYR DME ANTENNA		*I-SYR 0.9	1600	280°	2100	100° → 6000 ← 280° 2700
I-SYR 0.2		IM	1600	280°	2100	GS 3.00° TCH 60
0.2		0.9	2.5 NM	2.7 NM	4.2 NM	
CATEGORY	A		B		C	D
S-ILS 28			613/18		200 (200-½)	
S-LOC 28	800/24		387 (400-½)		800/35 387 (400-¾)	
	900-1		920-1		1020-1½	
	479 (500-1)		499 (500-1)		599 (600-1½)	
					1180-2½	
					759 (800-2½)	