

WAAS CH 50406 W01A	APP CRS 007°	Rwy Idg 10800 TDZE 11 Apt Elev 26
--	------------------------	--

RNAV (GPS) RWY 1L
TAMPA INTL (TPA)


T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 43°C (109°F). DME/DME RNP-0.3 NA. For inop ALSF, increase LPV Cat E visibility to RVR 4000, LNAV/VNAV Cat E visibility to 1½ mile, and LNAV Cat E visibility to RVR 6000. Simultaneous approach authorized with Rwy 1R. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations.

ALSF-2




MISSED APPROACH:
Climb to 3000 direct
MERRA and hold.

ARR	D-ATIS	DEP	TAMPA APP CON	TAMPA TOWER	GND CON	CLNC DEL	CPDLC
126.45		128.475	118.5 307.175	119.5 269.4	121.7 269.4	133.6	

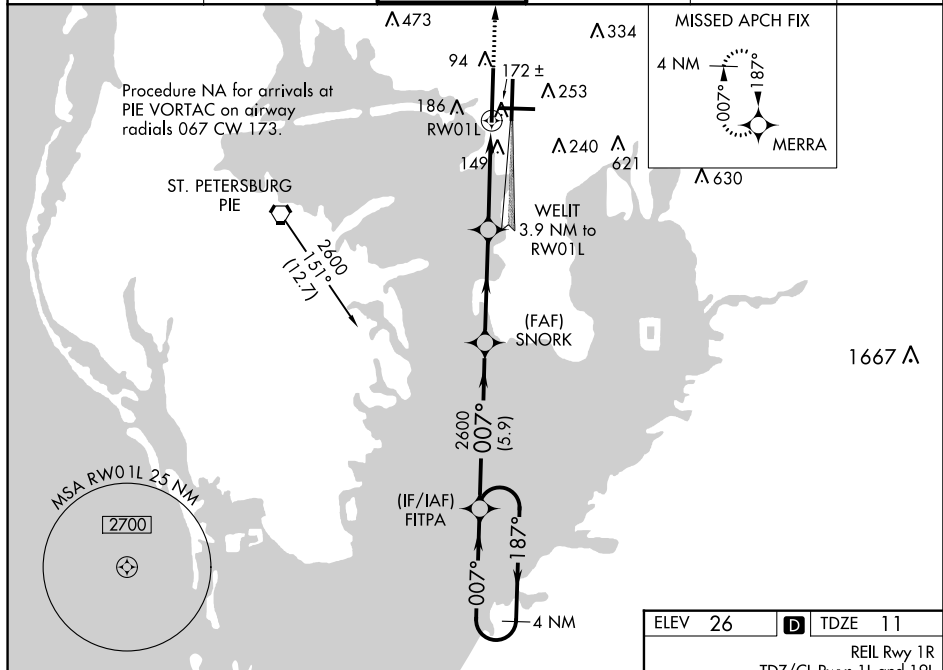

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 71).

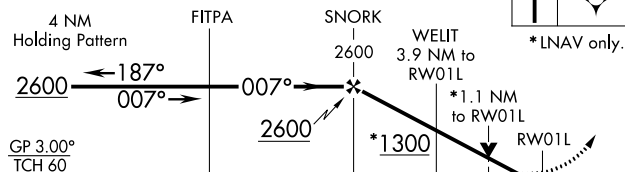

		5.9 NM		4 NM		2.8		1.1 NM			
CATEGORY	A	B		C		D		E			
LPV DA	211/18 200 (200-½)										
RNAV/ VNAV DA	431/45 420 (500-¾)										
RNAV MDA	440/24	429 (500-½)		440/40		429 (500-¾)					
C CIRCLING	560-1	534 (600-1)		680-1 ³ / ₄ 654 (700-1 ³ / ₄)		980-3		954 (1000-3)			

