

WAAS CH 65615 W03A	APP CRS 028°	Rwy Idg 5211 TDZE 3294 Apt Elev 3298
--	------------------------	---

RNAV (GPS) RWY 3

CHADRON MUNI (CDR)

RNP APCH-GPS.

▼

▲

Baro-VNAV NA when using Pine Ridge altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C or above 54°C. For inop ALS, when using Pine Ridge altimeter setting, increase LNAV/VNAV all Cats visibility to 1½ SM, LNAV Cats C and D visibility to 1¾ SM. VDP NA with Pine Ridge altimeter setting. When local altimeter setting not received, use Pine Ridge altimeter setting and increase LPV DA to 3564 feet, increase LNAV/VNAV DA to 3972 feet and all visibilities ½ SM. Increase all MDAs 80 feet and LNAV visibility Cat C/D ¾ SM, and Circling visibility Cat C ¼ SM. Inop table does not apply to LPV all Cats and LNAV Cats A/B. For inop ALS increase LNAV/VNAV all Cats visibility to 1¾. When using Pine Ridge altimeter setting, inop table does not apply to LPV all Cats and LNAV Cats A/B.


MALSRL

AS

1

MISSED APPROACH:
Climb to 5100 direct EDUQA and hold.

ASOS 118.05	DENVER CENTER 127.95 338.2	UNICOM 122.8 (CTAF)
-----------------------	--------------------------------------	-------------------------------

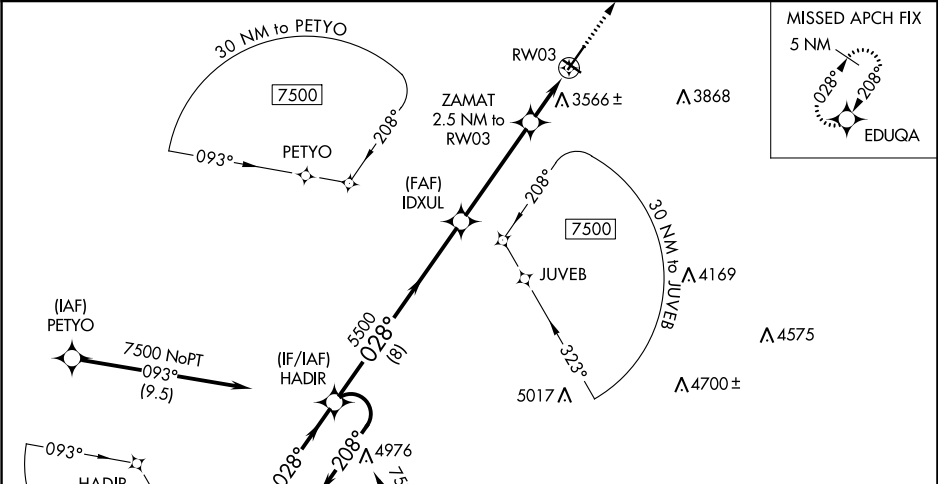

ELEV 3298		TDZE 3294	
7 NM Holding Pattern HADIR		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 61).	
7500 ← 208°		5100 EDUQA	
GP 3.00° TCH 60		*LNAV only	
028° →		IDXUL 5500	
028°		ZAMAT 2.5 NM to RWY 03	
5500		*1.5 NM to RWY 03	
8 NM		RWY 03	
4.2 NM		1 NM	
1.5 NM		1.5 NM	
CATEGORY	A	B	C
LPV DA	3494-1	200 (200-1)	
LNAV/VNAV DA	3902-1¾	608 (700-1¾)	
LNAV MDA	3820-1	526 (600-1)	
CIRCLING	3820-1 522 (600-1)	3920-1 622 (700-1)	3920-1¾ 622 (700-1¾)
			4220-3 922 (1000-3)

NC-2, 30 NOV 2023 to 28 DEC 2023

NC-2, 30 NOV 2023 to 28 DEC 2023