

WAAS CH 97411 W18A	APP CRS 177°	Rwy Idg 7981 TDZE 129 Apt Elev 131
--	------------------------	---

RNAV (GPS) RWY 18L

GREENVILLE MID-DELTA (GLH)


⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). Inop table does not apply to LNAV Cat D. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Greenwood altimeter setting: increase LPV DA to 437 feet; increase LNAV/VNAV DA to 547 feet and Cats A/B/C visibility ½ SM and Cat D visibility ¼ SM; increase all MDA 120 feet and LNAV Cat C visibility ½ SM and Circling Cat D visibility ½ SM. VDP and Baro-VNAV NA when using Greenwood altimeter setting. For inop MALS, increase LNAV/VNAV visibility all Cats to RVR 5000. For inop MALS, increase LNAV/VNAV visibility all Cats to RVR 5000.

MALS



MISSED APPROACH:
Climb to 2000 direct
BETJI and hold.

ASOS 125.525	MEMPHIS CENTER 135.875 269.35	GREENVILLE TOWER★ 119.0 (CTAF) 0 256.9	GND CON 121.8 256.9	UNICOM 122.95
------------------------	---	--	-------------------------------	-------------------------

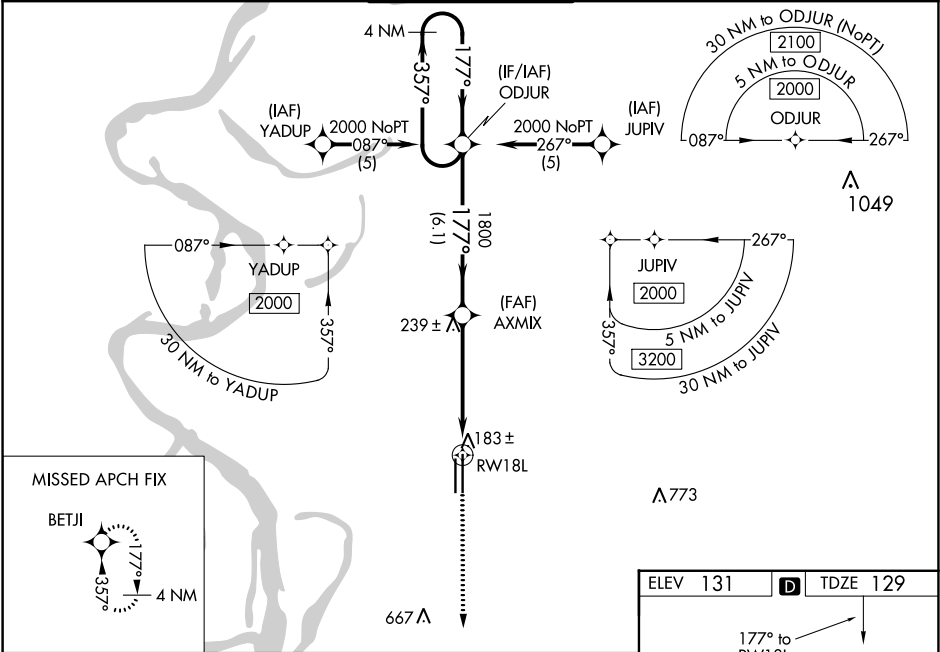

4 NM Holding Pattern		ODJUR		2000		BETJI	
2000		357° 177°		1800		* 0.9 NM to RW18L	
GP 3.00° TCH 53		1800		AXMIX		* LNAV only.	
		6.1 NM		4.1 NM		0.9 NM	
CATEGORY		A		B		C	
LPV DA		329/24 200 (200-½)					
LNAV/VNAV DA		439/24 310 (400-½)				439/40 310 (400-¾)	
LNAV MDA		460/24 331 (400-½)				460/50 331 (400-1)	
CIRCLING		600-1 469 (500-1)		600-1½ 469 (500-1½)		800-2 669 (700-2)	

